

Technical data

Rated voltage	230V AC
Input voltage range	100 - 240 V AC
Class	2
IP	65
IK	-
Diffuser	Clear PMMA
Bulb cover	No
Source	Built-in LED
Color temperature real output	2800°K warm white
Real light output	386 lm
Total consumption	8 W
Energy class	F (Source LED)
Luminous efficacy	48
IRC	75
SDCM	-
Dimmable	No
Ta	-
Led lifetime	> 70000h (L90/B50)
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	No
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)



Materials and finishes

Material	aluminium
Colour	Black grey - 107 - RAL 7021

Logistic data

Product dimensions	H.125 L.125 P.64
Net weight	1.021 Kg
Gross weight	1.100 Kg
Package dimensions 1	H.130 L.130 P.80


Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years

Technical data

Rated voltage	230V AC
Input voltage range	100 - 240 V AC
Class	2
IP	65
IK	-
Diffuser	Clear PMMA
Bulb cover	No
Source	Built-in LED
Color temperature real output	2800°K warm white
Energy class	F (Source LED)
IRC	75
SDCM	-
Dimmable	No
Ta	-
Led lifetime	> 70000h (L90/B50)
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	No
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)

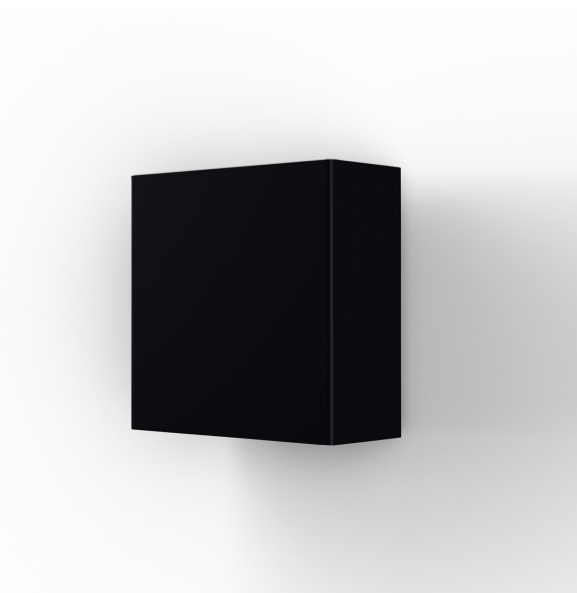

Materials and finishes

Material	aluminium
Colour	Velvet black - 113

Logistic data

Product dimensions	H.125 L.125 P.57
Net weight	0.930 Kg
Gross weight	1.009 Kg
Package dimensions 1	H.130 L.130 P.80

Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years

Technical data

Rated voltage	230V AC
Input voltage range	100 - 240 V AC
Class	2
IP	65
IK	-
Diffuser	Clear PMMA
Bulb cover	No
Source	Built-in LED
Color temperature real output	2800°K warm white
Energy class	F (Source LED)
IRC	75
SDCM	-
Dimmable	No
Ta	-
Led lifetime	> 70000h (L90/B50)
Ambient temperature range	-10 ~50°C
UGR	-
ULR	-
Photobiological Risk group	No
Fixing kit	Yes
With sensor	No
With IP55 socket	No

[Download the installation manual](#)



Materials and finishes

Material	aluminium
Colour	Velvet black - 113

Logistic data

Product dimensions	H.125 L.125 P.57
Net weight	1.030 Kg
Gross weight	1.109 Kg
Package dimensions 1	H.130 L.130 P.80

Certifications and warranties

CE	Yes
UL	No
EAC	Yes
RoHS	Yes
ENEC	No
Anti-corrosion	25 years (on Aluminium)
Technical	5 years
Electronics	5 years