


Design Renzo Piano Building Workshop iGuzzini

Product configuration: ALW3
ALW3: Wall-mounted, Transversal Asymmetric Comfort Optic, Warm LED, DALI 220-240V ac



ALW3: Wall-mounted. Transversal Asymmetric Comfort Optic. Warm LED. DALI 220-240V ac

Direct light luminaire, designed to use monochrome LED lamps. It consists of a body, an optical assembly and a base for fixing it to the wall. Optical assembly and die-cast aluminium glass-holder frame. 5mm thick tempered sodium-calcium closing glass with black serigraphy. Comfort prismatic glass with black serigraphy. Body and optical assembly subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. Transversal Asymmetric Comfort Optic (AT) with high performance Opti-smart reflectors in superpure aluminium coated with silver deposits offering uniform light distribution. Both the LED unit and the ballast may be substituted. Optical assembly complete with electronic control gear and output power cable. IP68 connectors to be ordered separately are required for the electrical connection. All the screws used are made of A2 stainless steel.

Wall-mounted with screw anchors not supplied with the product.





White (01) | Black (04) | Grey (15) | Rust Brown (F5)



2.5

mounting
wall surface

Product complete with DALI 220÷240V ac electronic control gear.


Overvoltage protection: 4kV in Common Mode (CM), 2kV in Differential Mode (DM). • The SPD accessory (JAL6) increases overvoltage protection to 6kV/10kV (CM/DM).



Im system:	1404	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	13.8	Voltage [Vin]:	230
Im source:	1950	Lamp code:	LED
W source:	11	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	101.7	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	72	Power factor:	See installation instructions
CRI (minimum):	80	Inrush current:	5 A / 50 µs
CRI (typical):	82	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Colour temperature [K]:	3000	Overvoltage protection:	4kV Common mode & 2kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)		

Polar



Design Renzo Piano Building Workshop iGuzzini

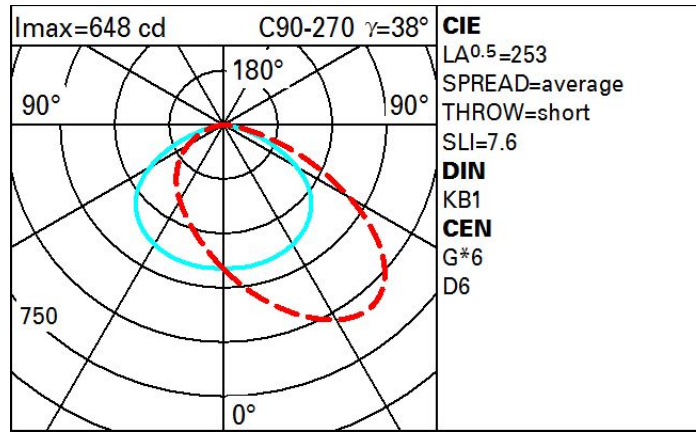Product configuration: ALW2
ALW2: Wall-mounted, Longitudinal Asymmetric Comfort Optic, Warm LED, DALI 220-240V ac



ALW2: Wall-mounted. Longitudinal Asymmetric Comfort Optic. Warm LED. DALI 220-240V ac

Direct light luminaire, designed to use monochrome LED lamps. It consists of a body, an optical assembly and a base for fixing it to the wall. Optical assembly and die-cast aluminium glass-holder frame. 5mm thick tempered sodium-calcium closing glass with black serigraphy. Comfort prismatic glass with black serigraphy. Body and optical assembly subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. Longitudinal Asymmetric Comfort Optic (AL) with high performance Opti-smart reflectors in superpure aluminium coated with silver deposits offering uniform light distribution. Both the LED unit and the ballast may be substituted. Optical assembly complete with electronic control gear and output power cable. IP68 connectors to be ordered separately are required for the electrical connection. All the screws used are made of A2 stainless steel.

Wall-mounted with screw anchors not supplied with the product.

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

2.5

Mounting
wall surface

Product complete with DALI 220÷240V ac electronic control gear.


Overvoltage protection: 4kV in Common Mode (CM), 2kV in Differential Mode (DM). • The SPD accessory (JAL6) increases overvoltage protection to 6kV/10kV (CM/DM).

Complies with EN60598-1 and pertinent regulations





Im system:	1424	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	13.8	Voltage [Vin]:	230
Im source:	1950	Lamp code:	LED
W source:	11	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	103.2	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	73	Power factor:	See installation instructions
CRI (minimum):	80	Inrush current:	5 A / 50 µs
CRI (typical):	82	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Colour temperature [K]:	3000	Overvoltage protection:	4kV Common mode & 2kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)		

Polar

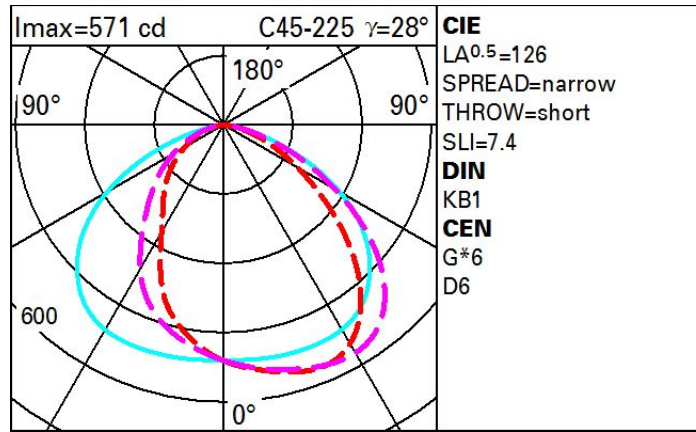

Design Renzo Piano Building Workshop iGuzzini

Product configuration: ALW1
ALW1: Wall-mounted, Transversal Asymmetric Optic, Warm LED, DALI 220-240V ac



ALW1: Wall-mounted. Transversal Asymmetric Optic. Warm LED. DALI 220-240V ac

Direct light luminaire, designed to use monochrome LED lamps. It consists of a body, an optical assembly and a base for fixing it to the wall. Optical assembly and die-cast aluminium glass-holder frame. 5mm thick tempered sodium-calcium closing glass with black serigraphy. Transparent glass with black serigraphy for high performance direct and indirect lighting. Body and optical assembly subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. Transversal Asymmetric Optic (AT) with high performance Opti-smart reflectors in superpure aluminium coated with silver deposits offering uniform light distribution. Both the LED unit and the ballast may be substituted. Optical assembly complete with electronic control gear and output power cable. IP68 connectors to be ordered separately are required for the electrical connection. All the screws used are made of A2 stainless steel.

Wall-mounted with screw anchors not supplied with the product.

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

2.5

Mounting
wall surface

Product complete with DALI 220÷240V ac electronic control gear.


Overvoltage protection: 4kV in Common Mode (CM), 2kV in Differential Mode (DM). • The SPD accessory (JAL6) increases overvoltage protection to 6kV/10kV (CM/DM).

Complies with EN60598-1 and pertinent regulations




lm system:	2278	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	23.2	Voltage [Vin]:	230
lm source:	3120	Lamp code:	LED
W source:	20	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	98.2	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	73	Power factor:	See installation instructions
CRI (minimum):	80	Inrush current:	5 A / 50 µs
CRI (typical):	82	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Colour temperature [K]:	3000	Overvoltage protection:	4kV Common mode & 2kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)		


Polar

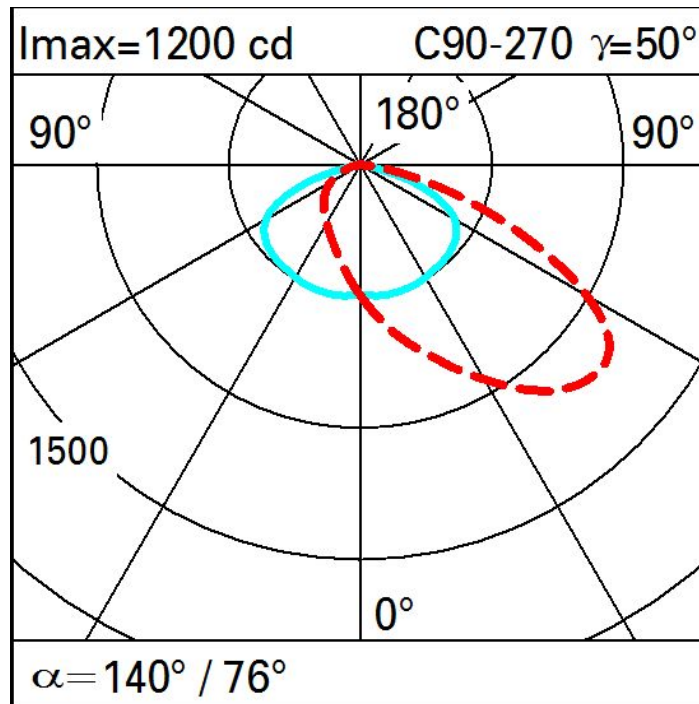

Isolux


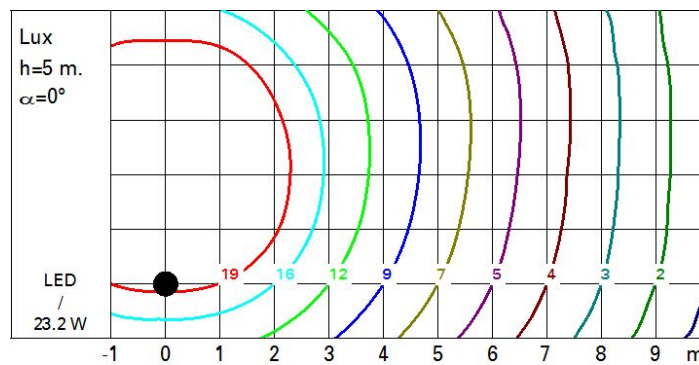


Illuminances

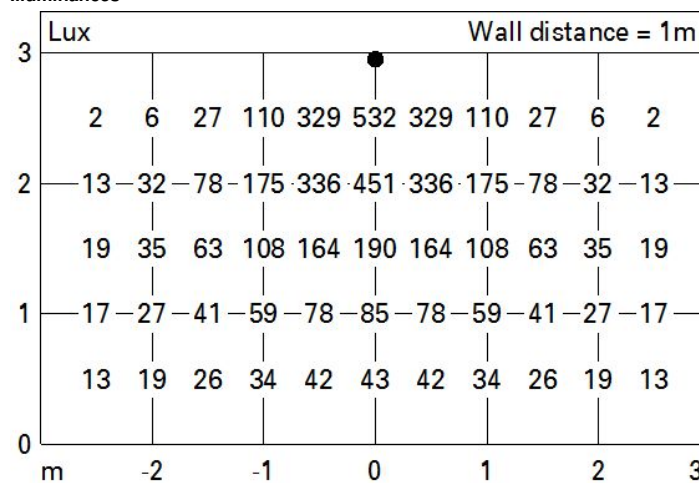

Design Renzo Piano Building Workshop iGuzzini

Product configuration: ALW0
ALW0: Wall-mounted, Longitudinal Asymmetric Optic, Warm LED, DALI 220-240V ac



ALW0: Wall-mounted. Longitudinal Asymmetric Optic. Warm LED. DALI 220-240V ac

Direct light luminaire, designed to use monochrome LED lamps. It consists of a body, an optical assembly and a base for fixing it to the wall. Optical assembly and die-cast aluminium glass-holder frame. 5mm thick tempered sodium-calcium closing glass with black serigraphy. Transparent glass with black serigraphy for high performance direct and indirect lighting. Body and optical assembly subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. Longitudinal Asymmetric Optic (AL) with high performance Opti-smart reflectors in superpure aluminium coated with silver deposits offering uniform light distribution. Both the LED unit and the ballast may be substituted. Optical assembly complete with electronic control gear and output power cable. IP68 connectors to be ordered separately are required for the electrical connection. All screws used are made of stainless steel.

Wall-mounted with screw anchors not supplied with the product.

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

2.5

Mounting
wall surface

Product complete with DALI 220÷240V ac electronic control gear.


Overvoltage protection: 4kV in Common Mode (CM), 2kV in Differential Mode (DM). • The SPD accessory (JAL6) increases overvoltage protection to 6kV/10kV (CM/DM).

Complies with EN60598-1 and pertinent regulations




Im system:	2371	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	23.2	Voltage [Vin]:	230
Im source:	3120	Lamp code:	LED
W source:	20	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	102.2	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	76	Power factor:	See installation instructions
CRI (minimum):	80	Inrush current:	5 A / 50 µs
CRI (typical):	82	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
Colour temperature [K]:	3000	Overvoltage protection:	4kV Common mode & 2kV Differential mode
MacAdam Step:	3	Control:	DALI-2
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)		

Polar

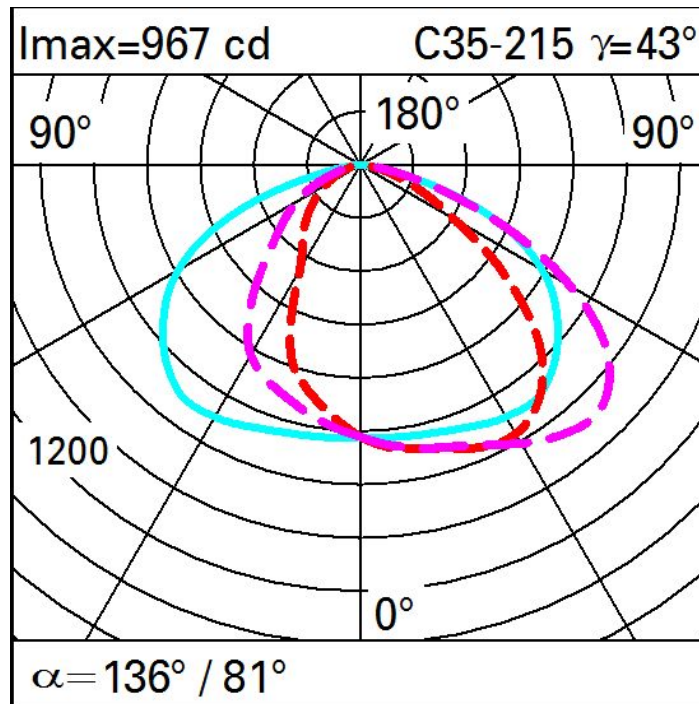

Isolux

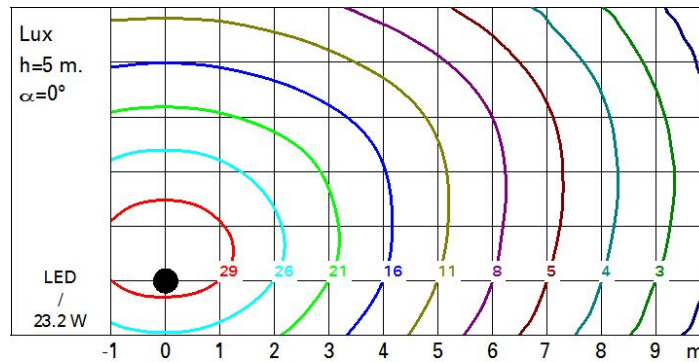

Illuminances

