



UTILIZZO / USE

TIPOLOGIA / TYPOLOGY

MATERIALI / MATERIALS

FINITURE / COLOURS

FINITURE SPECIALI / SPECIAL FINISHES

SORGENTE LUMINOSA / LIGHT SOURCE

TIPO SORGENTE / SOURCE TYPE

CLASSE ENERGETICA / ENERGY CLASS

TIPO DI EMISSIONE / LIGHT EMISSION TYPE

L. CAVO DI ALIM. E SOSP. / FEED & SUSP. CABLE LENGHT

TENSIONE DI ALIMENTAZIONE / SUPPLY VOLTAGE

ALIMENTAZIONE DELLA SORGENTE / SOURCE FEED

ALIMENTATORE / TRANSFORMER/BALLAST/LED DRIVER

DIMMERAZIONE / DIMMING

SEGNALE DI CONTROLLO / DIMMING PROTOCOL

CERTIFICAZIONI / CERTIFICATION

GRADO IP / IP PROTECTION

Interno / Indoor

Applique / Wall

Ottone / Brass

Alluminio / Aluminium

RAL 9010 Bianco puro / Pure white

RAL 9005 Nero intenso / Jet black

Verde artico / Artic green

Finitura ottone / Brass

Inclusa / Included

Led / Led

A

Diffusa / Diffuse

3,0m

230V

Alim. elettronico in tensione costante /

Constant voltage electr. power supply unit

Incluso / Included

A richiesta / On request


Dali / Push

CE

IP20

Gli anelli di Rings sono disponibili in diversi diametri. Ogni anello è indipendente ed è possibile creare composizioni di qualsiasi forma e dimensione.

Rings structures are available in different diameters. Each ring is independent and it is possible to create compositions of any shape and size.

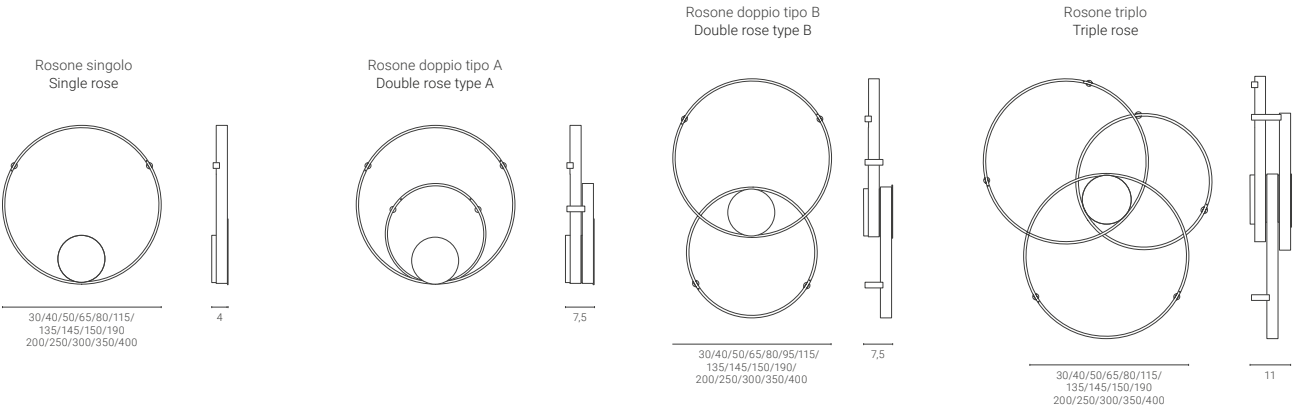

MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	Ø30cm	Ø40cm	Ø50cm
	Ø12,5 Cm	Ø12,5 Cm	Ø12,5 Cm
	0,4KG	0,53KG	0,7KG
	10,5W	14W	17W
	24V	24V	24V
	1224Lm	1632Lm	2041Lm
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	2700K/3000K/4000K	2700K/3000K/4000K	2700K/3000K/4000K
	>94	>94	>94
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	Ø65cm	Ø80cm	Ø95cm
	Ø14,5	Ø14,5 Cm	Ø20Cm
	0,9KG	1,0KG	1,1KG
	32W	40W	48W
	24V	24V	24V
	2653Lm	3267Lm	3879Lm
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	2700K/3000K/4000K	2700K/3000K/4000K	2700K/3000K/4000K
	>94	>94	>94
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	Ø115cm	Ø135cm	Ø145cm
	Ø20 Cm	Ø22 Cm	Ø22 Cm
	1,6KG	1,8KG	1,93KG
	57W	67W	72W
	24V	24V	24V
	4694LM	5511Lm	5919Lm
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	2700K/3000K/4000K	2700K/3000K/4000K	2700K/3000K/4000K
	>94	>94	>94
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	Ø150cm	Ø190cm	Ø200cm
	Ø22 Cm	Ø22 Cm	Ø22 Cm
	2,0KG	2,55KG	2,68KG
	74W	94W	99W
	24V	24V	24V
	6123Lm	7756Lm	8164Lm
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	2700K/3000K/4000K	2700K/3000K/4000K	2700K/3000K/4000K
	>94	>94	>94
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	Ø250cm	Ø300cm	Ø350cm
	Ø33	Ø33	Ø33
	3,36KG	4,03KG	4,7KG
	115W	148W	177W
	24V	24V	24V
	10205Lm	12246Lm	14287Lm
MISURE ROSONE/ CEILING ROSE MEASURES PESO ANELLO / RING WEIGHT ASSORBIMENTO / POWER CONSUMPTION TENSIONE ALIM. LED / LED POWER SUPPLY VOLTAGE FLUSSO LUMINOSO LED / LED LUMINOUS FLUX TEMPERATURE DI COLORE / CCT RESA CROMATICA / CRI	2700K/3000K/4000K	2700K/3000K/4000K	2700K/3000K/4000K
	>94	>94	>94