

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown




canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details

wall or ceiling lamp
canopy versionwall or ceiling lamp
recessed version


acoustic performance

PL UL 1 090 h10 cm recessed
PL UL 2 090 h25 cm recessed





PL UL 1: kg 2,7 m³ 0,126

PL UL 2: kg 3,1 m³ 0,126

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED

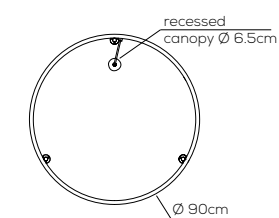

rosone incasso / recessed canopy

altezze disponibili
available heights10 cm
height25 cm
height

Type	Article	Colours	Version	Source
PL	UL 1 090 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 54W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request
	UL 2 090 LED (h25 cm)	RU rust brown		

CE IP20 CRI90 ~5158 lm* 95 lm/W* 24Voc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).
Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code PL UL1090LED RU IN
Casambi compatibile / Casambi compatible.



KITFAPLUL090IAV opzione fonoassorbente avorio / sound absorbing option ivory.
For more information see page 165



This luminaire contains a light source with the energy class F.



SCAN ME



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,01	0,11	0,32	0,68	0,63	0,63	0,58	0,42	0,54

CUSTOMER

NOTES

PL UL _ 090 LED _ _ IN

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown




canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details


wall or ceiling lamp
canopy versionwall or ceiling lamp
recessed version

acoustic performance


PL UL 1 120 h10 cm recessed
PL UL 2 120 h25 cm recessed

PL UL 1: kg 3,2 m³ 0,150
PL UL 2: kg 3,6 m³ 0,150


U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED



rosone incasso / recessed canopy



altezze disponibili
available heights



10 cm
height

25 cm
height

Type	Article	Colours	Version	Source
PL	UL 1 120 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 74W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request
	UL 2 120 LED (h25 cm)	RU rust brown		

CE IP20 CRI90 LED ~7736 lm* 104 lm/W* 24VDC

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).
Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code PL UL2120LED AN IN
Casambi compatibile / Casambi compatible.



KITFAPLUL120IAV opzione fonoassorbente avorio / sound absorbing option ivory.
For more information see page 165



This luminaire contains a light source with the energy class F.



Ecodesign

SCAN ME



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,02	0,15	0,43	0,91	0,84	0,83	0,74	0,56	0,73

CUSTOMER

NOTES

PL UL _ 120 LED _ _ IN

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown



canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details


wall or ceiling lamp
canopy version

wall or ceiling lamp
recessed version


acoustic performance

PL UL 1 160 h10 cm recessed PL UL 2 160 h25 cm recessed

PL UL 1: kg 5 m³ 0,280
PL UL 2: kg 5,4 m³ 0,280

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED

Type	Article	Colours	Version	Source
PL	UL 1 160 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 102W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request
	UL 2 160 LED (h25 cm)	RU rust brown		

CE IP20 CRI90 LED ~9025 lm* 88 lm/W* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).
Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code PL UL1160LED RU IN


Casambi compatibile / Casambi compatible.



KITFAPLUL000IAV opzione fonoassorbente avorio / sound absorbing option ivory.
For more information see page 165




This luminaire contains a light source with the energy class F.



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,05	0,29	0,93	1,48	1,60	1,52	1,45	1,04	1,34

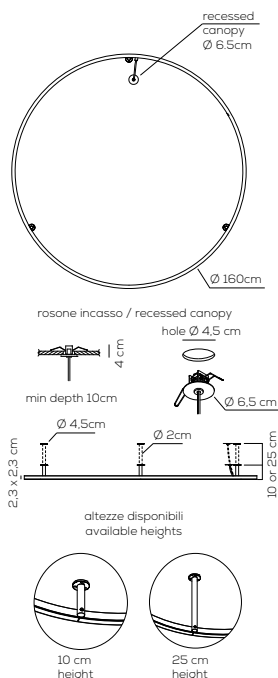

CUSTOMER

NOTES

PL UL _ 160 LED _ _ IN

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown



canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details


wall or ceiling lamp
canopy version

wall or ceiling lamp
recessed version


acoustic performance

PL UL 1 180 h10 cm recessed

PL UL 2 180 h25 cm recessed

PL UL 1: kg 5,7 m³ 0,310

PL UL 2: kg 6,1 m³ 0,310

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED

Type	Article	Colours	Version	Source
PL	UL 1 180 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 123W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request
	UL 2 180 LED (h25 cm)	RU rust brown		

CE IP20 CRI90 ~10315 lm* 84 lm/W* 24VDC

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).
Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).


example composition code PL UL1180LED RU IN



KITFAPLUL000IAV opzione fonoassorbente avorio / sound absorbing option ivory.
For more information see page 165




This luminaire contains a light source with the energy class F.




Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,12	0,66	1,65	2,86	2,96	2,68	2,46	1,91	2,49



rosone incasso / recessed canopy
hole Ø 4,5 cm



altezze disponibili
available heights



10 cm
height



25 cm
height

CUSTOMER

NOTES

PL UL _ 180 LED _ _ IN

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.