



Specification

LLS2.0 series- LS4067




LS4067

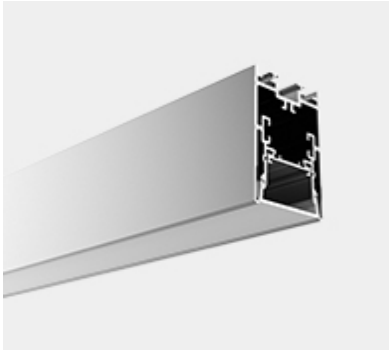


Features

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Specially designed light source with PC diffusers producing homogenous & soft lighting
- Super free connection: 180 ° extender, "L-", "T-" and "X-" type light corner
- Various installation ways: pendant, recessed, surface and wall mounted

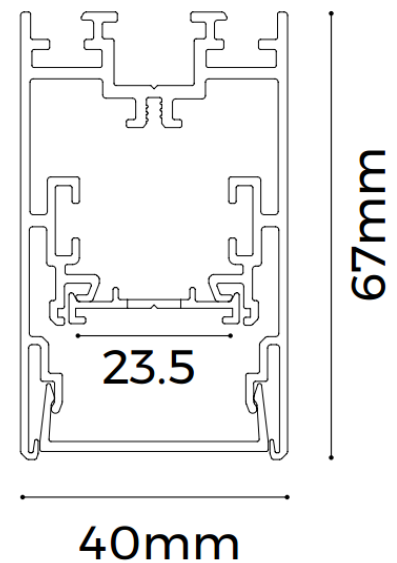

Details

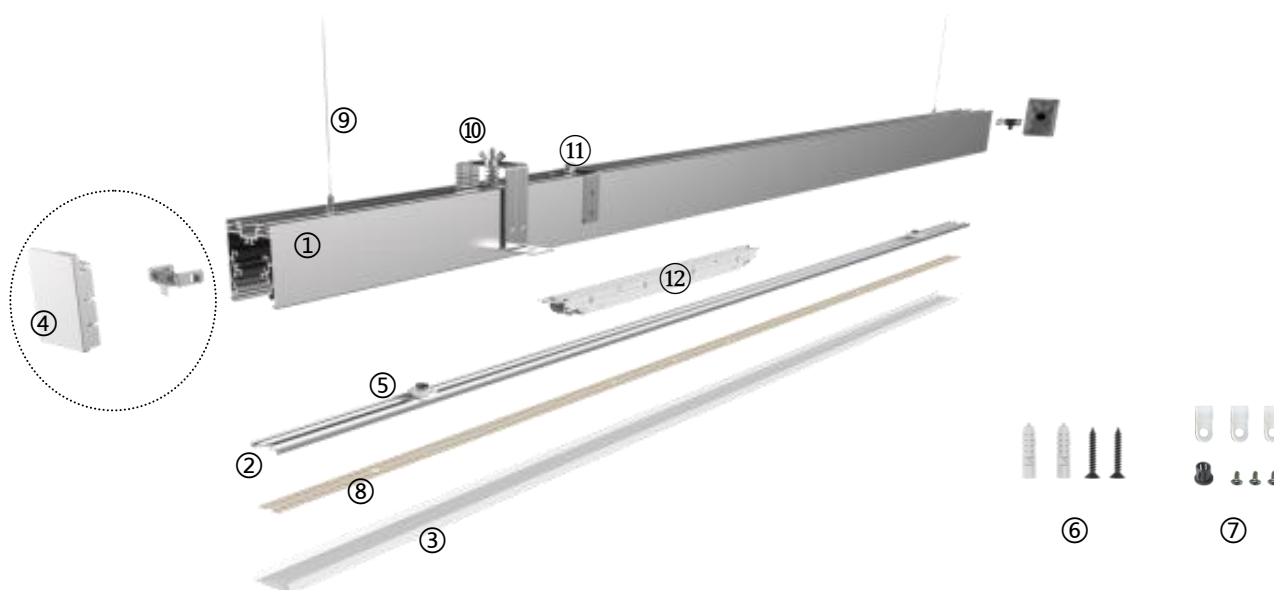

Standard Configuration



①Profile ②Carrier:

Installation : Pendant/Recessed/Surface mounted/Wall mounted

Material: AL6063-T5

Applications: Indoors

Profile weight: 1.5kg/2.5m

Size: L2500*W40*H67mm

Surface processing: Anodizing



③Diffuser:

Type: Frosted diffuser

Material: PC

Light transmittance : 86%

Size : L2500*W34.2*H10.2mm

PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.



④End cap

L40*W67*H11.5mm

Fireproof PC& magnet



⑤Quick locker

L21.8*W14*H7.7mm

PA66



⑥Screw set


M3.5*40mm

Carbon steel



⑦Cable clip

Optional Accessories

	⑨Pendant cable with junction box	Steel cable D1.5*2000/4000mm	Junction box L80*W80*H30mm
	⑨Pendant cable without junction box	Steel cable D1.5*2000/4000mm	
	⑩Recessed buckle	L96*W25*H75mm	SPCC
	⑪Wall-mounted buckle	L50*W34*H18mm	SPCC
	⑫Power supply	ESD-V24-025S	330*21*20mm
	⑧Flexible strip D8280-24V-20mm	DC24V 20W/m width 20mm	Min. cutting unit 50mm
	⑧Rigid modular DY8280-24V-23mm	DC24V 20W/m width 23mm	Min. cutting unit 50mm

Corners

L-type corner (L90-LS4067)




Al6063-T5&PC
2.5W
L100*W100*H67mm

L-type inner corner(L90N- LS4067)



Al6063-T5&PC
2W
L100*W100*H40mm

L-type exterior corner(L90W- LS4067)



Al6063-T5&PC
6W
L150*W150*H40mm

T-type corner(T90- LS4067)



Al6063-T5&PC
4W
L150*W100*H67mm

X-type corner(X90- LS4067)



Al6063-T5&PC
5W
L150*W150*H67mm

180° extender




SPCC
silver
L55*W10*H2mm

* The corners can be provided with or without light source.


Optical Parameter

D8280-24V-20mm light source, frosted diffuser

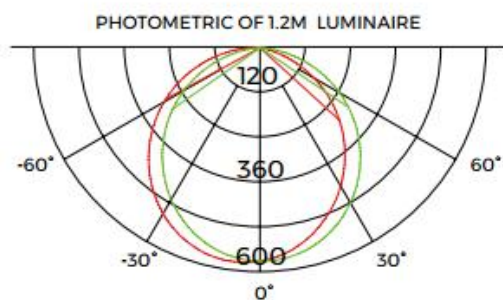

Height	Eavg, Emax	Angle:109.09deg	Diameter
1m	178.1,598.0lx		280.86cm
2m	44.53,149.51lx		561.72cm
3m	19.79,66.45lx		842.58cm
5m	7.125,23.92lx		1404.29cm
7m	3.635,12.21lx		1966.01cm

Package

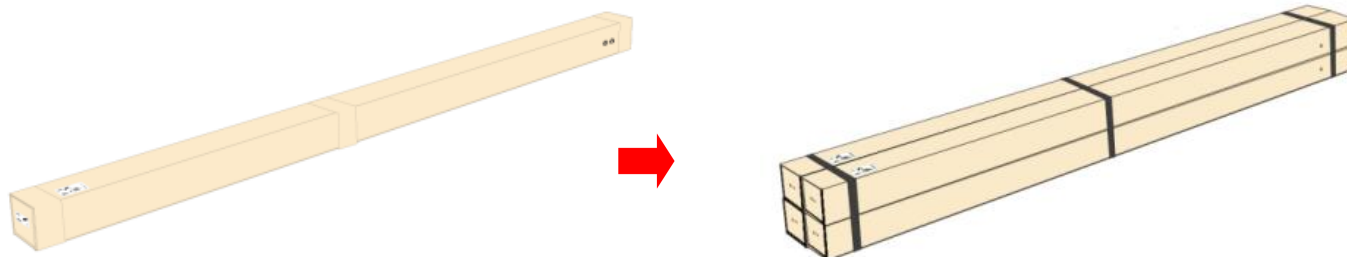

Individual Package

Type	Size(mm)	NW(kg)	GW(kg)	Content
Packing box	87*47.5*2580	3.69	4.19	1 set (profile + carrier + diffuser)

Bundle

CBM(m ³)	Size(mm)	NW(kg)	GW(kg)	Qty/bundle
0.042	174*95*2580	14.76	20.76	4 sets

Ways to sell :

Standard product + flexible customization

Profile components									
Standard product	Item	Profile	Carrier	Diffuser	End cap	Quick locker	Screw set	Cable clip	
	PIC								
	Amount	1 pcs	1 pcs	1 pcs	2 pcs	4 pcs	3 pcs	1 set	
Options	Customizable length: ≤2.5m, customizable label: by COLORS/customer Customizable profile color: silver, black, white								
Accessory 1 (can be sold separately)									
Standard product	Item	End cap	Screw set	Quick locker	Pendant accessories	Flexible strip	Rigid modular	Recessed buckle	Wall-mounted buckle
	PIC								
	Amount	2 pcs	4 pcs	2 pcs/set	2 pcs/set 3 pcs/set	2.5 m/reel	X pcs/box	2 Set/box	2 Set/box
Accessory 2 (can be sold separately)									
Standard product	Item	Power supply	L-type corner	L-type inner corner	L-type exterior corner	T-type corner	X-type corner	180° extender	
	PIC								
	Amount	1 pcs/set	2 Set /box	2 Set /box	2 Set / box	1 Set / box	1 Set / box	10 bags / box	
Options	* The corners can be provided with or without light source.								
Finished luminaires									
Standard product	Item	2.5m luminaire							
	Amount	1 pcs							
Options	* Customizable length ≤2.5m * Customizable profile color: silver, black, white * Please take the cutting unit into consideration when you need to customize the luminaire size * Optional label: by COLORS/customer								

