
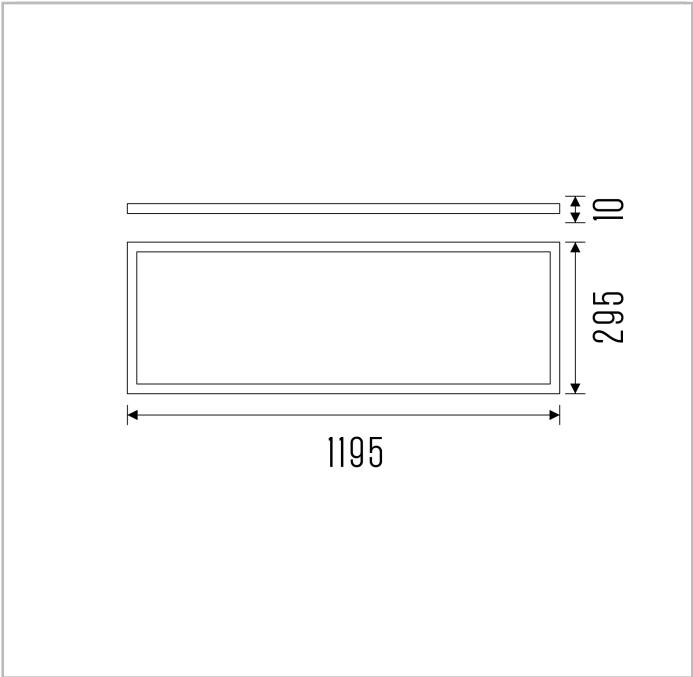


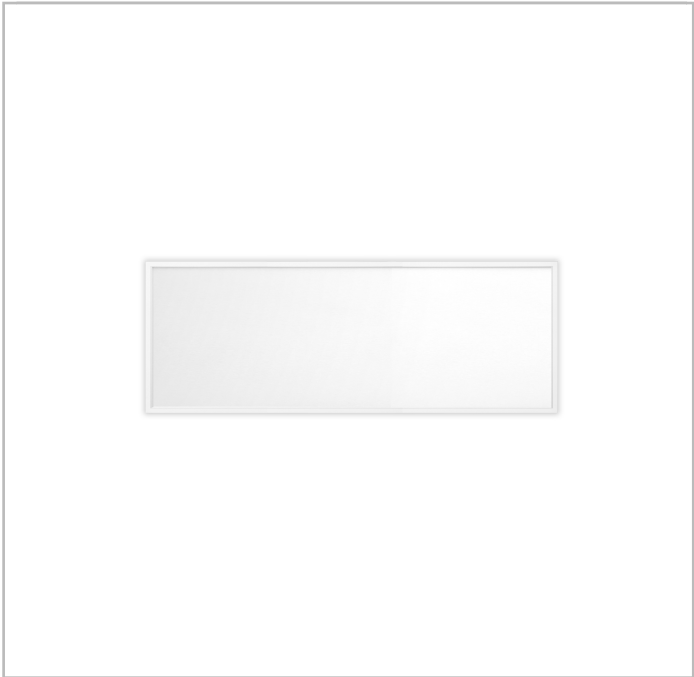

SKU	: 3.004F0A8300099W0000
Installation Method	: Recessed
Housing Material	: Extruded Aluminum
Housing Colour	: White (RAL 9016)
Optic	: Microprismatic Diffuser
Beam Angle [deg]	: 90°
System Power [W]	: 36W
Luminous Flux [lm]	: 3600lm
System Efficiency [lm/W]	: 100lm/W
CCT [K]	: 3000K
CRI [Ra]	: (Ra) >80
Chromaticity Tolerance	: 5
Mains Voltage [VAc]	: 220-240V / 50-60Hz
Ambient Temperature [degC]	: 35°C
Ingress Protection	: IP20
Light Source Energy Class	: F
Light Source Identifier	: 16.00.000340X
Lifetime/Failure Rate [h]	: >50000h/L80B20
Electrical Safety Class	: Class II
Net Weight [kg]	: 3.20kg
Certifications/Declarations	: CE/UKCA

Warranty [Y]	: 5 years
Wires	: Wieland

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K.
Technical data can change without prior notice.