


CHALLENGE.

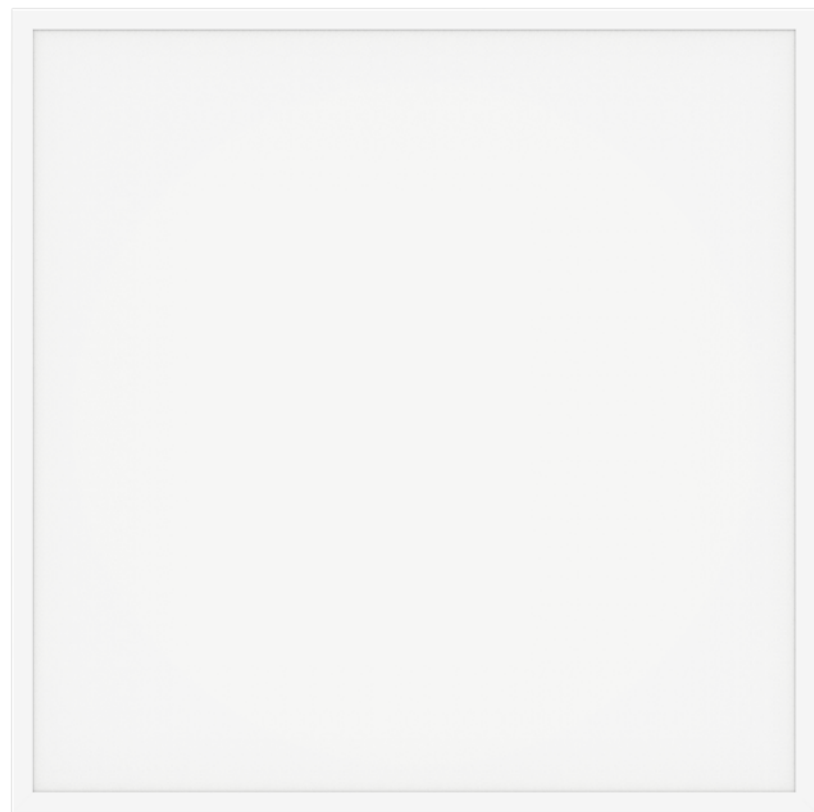


FULL FOCUS. ALWAYS AND EVERYWHERE.

The most universal luminaire, with UGR <19, for recessed, surfaced or suspended installation.

The Challenge provides the most uniform illumination in offices, showrooms, workshops, classrooms, conference rooms and lobbies.

CHALLENGE II 60X60.

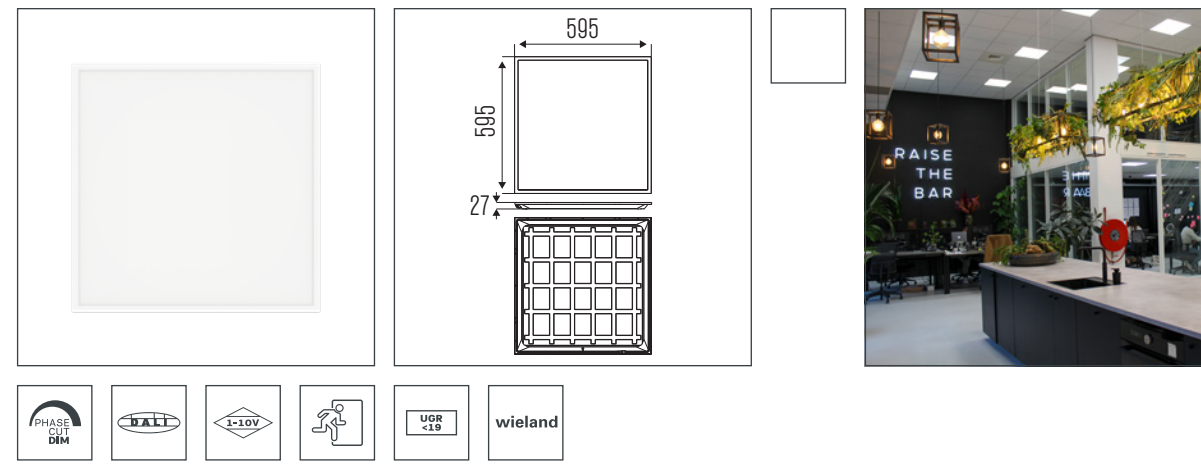


CCT [K]	: 3000K, 4000K	Optic	: Microprismatic Diffuser 90°
CRI [Ra]	: [Ra] >80	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 5	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: 4200lm	Ingress Protection [IP]	: IP40
System Power [W]	: 30W	Net Weight [kg]	: 3.1kg
System Efficiency [lm/W]	: 140lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class II		

Go to full specs



CHALLENGE 120X30.

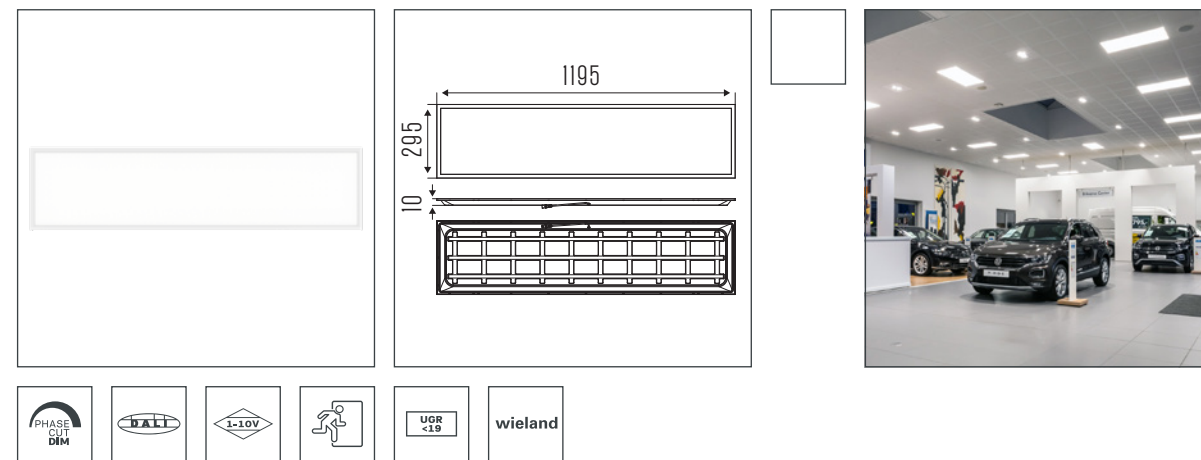

CCT [K]	: 3000K - 4000K	Optic	: Microprismatic Diffuser 90°
CRI [Ra]	: [Ra] >80	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 5	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: 3600lm	Ingress Protection [IP]	: IP20
System Power [W]	: 36W	Net Weight [kg]	: 3.2kg
System Efficiency [lm/W]	: 100lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class II		

Go to full specs



CHALLENGE. ACCESSORIES

Go to page



CHALLENGE SUSPENSION SET.




Go to full specs



Suspension set for Challenge.

CHALLENGE II 60X60 SURFACE MOUNTED FRAME.

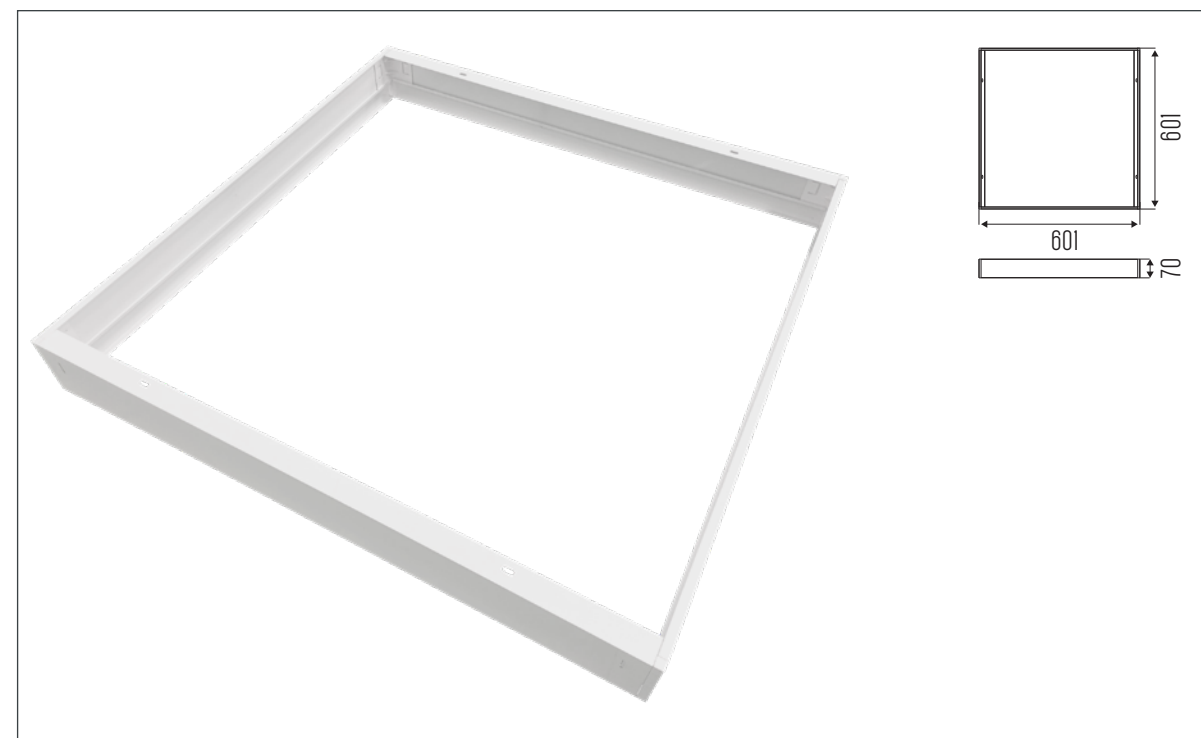


Go to full specs



Surface mounted frame for Challenge II 60x60. Frame dimensions: 601x601x70mm.

CHALLENGE 120X30 SURFACE MOUNTED FRAME.

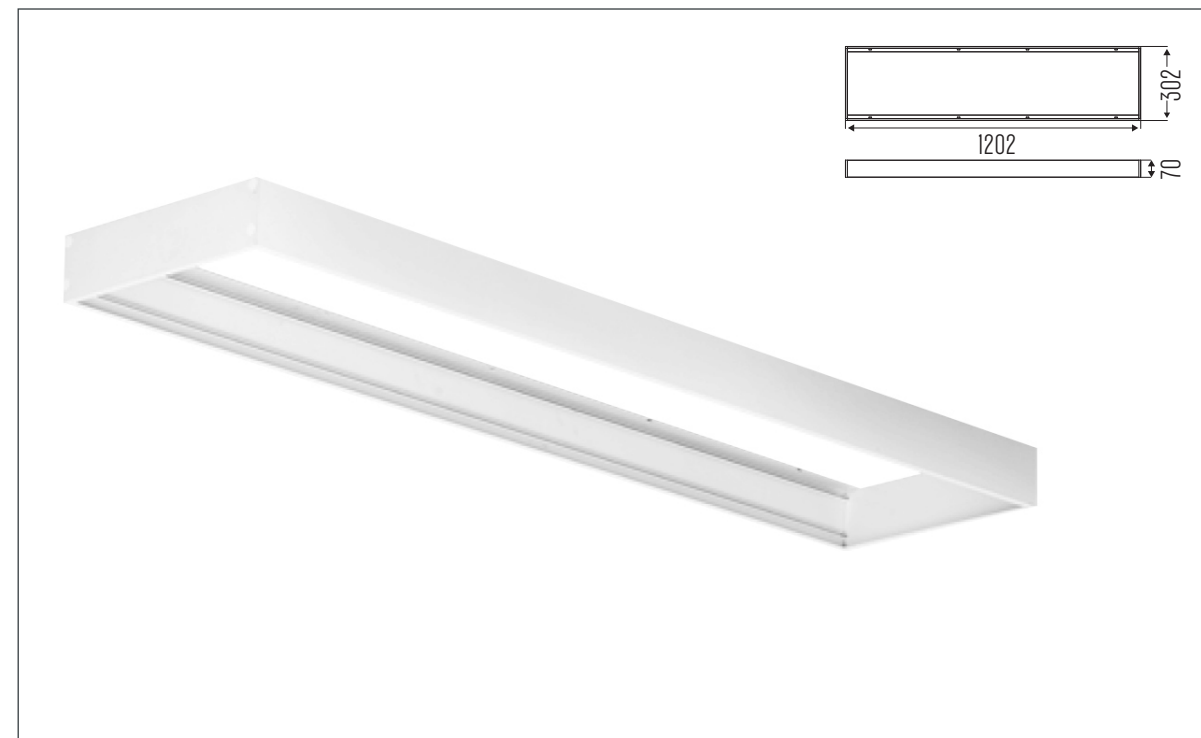

Go to full specs



Surface mounted frame for Challenge 120x30. Frame dimensions: 1202x302x70mm.