




**DTC-TR - PROFILE B**

424 01 00 00 B

AVAILABLE IN  
**BLACK** 424 01 00 00 B



 [View on website](#)

| General info    |                                |
|-----------------|--------------------------------|
| LOCATION        | indoor                         |
| INSTALLATION    | Ceiling Recessed,Wall Recessed |
| WEIGHT (KG)     | 1                              |
| INFORMATION     | MAX.L/ PROFILE : 6m            |
| Electrical info |                                |
| CERTIFICATION   | CB, ENEC                       |

For detailed installation instructions, please consult the manual: [424\\_01\\_00\\_00\\_HAND.pdf](#)


Notes:



**DTC-LEDLINE PROFILE B**

424 02 00 00 B

AVAILABLE IN  
**BLACK** 424 02 00 00 B



 [View on website](#)



| General info     |                                            |
|------------------|--------------------------------------------|
| LOCATION         | indoor                                     |
| INSTALLATION     | Ceiling Recessed,Wall Recessed             |
| WEIGHT (KG)      | 1                                          |
| INFORMATION      | MAX.L / PROFILE : 4m<br>INCL.WALLWASH LENS |
| Electrical info  |                                            |
| CLASS            | III                                        |
| Lightsource info |                                            |
| LIGHTSOURCE NAME | LED                                        |

For detailed installation instructions, please consult the manual: [424\\_02\\_00\\_00\\_HAND.pdf](#)

Notes:





## DOT.COM S3 ST 93059 B-B

424 211 03 933 B-B

AVAILABLE IN

**BLACK-BLACK** 424 211 03 933 B-B

**WHITE-BLACK** 424 211 03 933 W-B



[View on website](#)



### General info

|                                           |                                                         |
|-------------------------------------------|---------------------------------------------------------|
| <b>LOCATION</b>                           | indoor                                                  |
| <b>INSTALLATION</b>                       | Ceiling Recessed                                        |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | rectangle - 58 x 20                                     |
| <b>RECESSED DEPTH (MM)</b>                | 50                                                      |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | min.8                                                   |
| <b>INGRESS PROTECTION</b>                 | IP20                                                    |
| <b>WEIGHT (KG)</b>                        | 0.1                                                     |
| <b>ADJUSTABILITY</b>                      | non adjustable                                          |
| <b>INFORMATION</b>                        | 3 x REFLECTOR WFL-56°<br>EXCL.LED POWER SUPPLY 350mA-DC |

### Electrical info

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>CLASS</b>        | III                                        |
| <b>DIM TYPE</b>     | depending on type of external power supply |
| <b>ENERGY CLASS</b> | E                                          |
| <b>CERTIFICATES</b> | CB, EAC, ENEC                              |

### Lightsource info

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                |
| <b>LIGHTSOURCE</b>                 | LED cluster 3,1W / CRI>90 (R9: 50) / 3000K / 341lm |
| <b>TM-30 VALUES</b>                | Rf: 90 / Rg: 101                                   |
| <b>SDCM</b>                        | SDCM3                                              |
| <b>LM80</b>                        | L80 > 60000                                        |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 341lm // 3,1W // 112lm/W                           |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 221lm // 4W // 62lm/W                              |

### Requirements










LED POWER SUPPLY 350mA-DC DIM

For detailed installation instructions, please consult the manual: [424\\_211\\_03\\_XXX\\_HAND.pdf](#)

CEILING COMPATIBILITY


| Ceiling Type                                                                                                         | Mounting Kit |
|----------------------------------------------------------------------------------------------------------------------|--------------|
|  <b>System ceiling</b>               | -            |
|  <b>Plasterboard</b>                 | -            |
|  <b>Wood</b>                         | -            |
|  <b>Concrete</b>                     | -            |
|  <b>Concrete + plaster</b>           | -            |
|  <b>Lintel + plaster</b>            | -            |
|  <b>Hollow-core slab</b>           | -            |
|  <b>Hollow-core slab + plaster</b> | -            |
|  <b>Stretched ceiling</b>          | -            |

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                                                            |           | #                        |
|------------------------------------------------------------------------------------|------------------------------------------------------------|-----------|--------------------------|
|    | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9         | 1->8(8)   | <input type="checkbox"/> |
|    | <b>300 90 68</b> LED POWER SUPPLY MULTI-POWER DIM5         | 1->5(4)   | <input type="checkbox"/> |
|    | <b>300 90 69</b> LED POWER SUPPLY MULTI-POWER HV DIM9      | 3->13(13) | <input type="checkbox"/> |
|  | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7        | 2->5(4)   | <input type="checkbox"/> |
|  | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5   | 2->5(4)   | <input type="checkbox"/> |
|  | <b>21012 0010</b> LED POWER SUPPLY MULTI POWER             | 2->5      | <input type="checkbox"/> |
|  | <b>21012 0021</b> LED POWER SUPPLY MULTI POWER DIM1        | 2->6      | <input type="checkbox"/> |
|  | <b>21012 0035</b> LED POWER SUPPLY MULTI POWER DIM5        | 2->6      | <input type="checkbox"/> |
|  | <b>21012 005W</b> LED POWER SUPPLY MULTI-POWER COMPACT WDL | 2->6      | <input type="checkbox"/> |


DOT.COM S3 ST 93059 B-B

424 211 03 933 B-B




**21012 0258** LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

2->3

☐


**21012 0268** LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

4->4

☐


**21012 0298** LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->5

☐

**21012 0308** LED POWER SUPPLY 350mA / 7,35W DIM8

2->2

☐

**21032 0295** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->4

☐

Notes:





## DOT.COM S6 ST 93059 W-B

424 211 06 933 W-B

AVAILABLE IN

**BLACK-BLACK** 424 211 06 933 B-B

**WHITE-BLACK** 424 211 06 933 W-B



[View on website](#)

### General info

|                                           |                                                         |
|-------------------------------------------|---------------------------------------------------------|
| <b>LOCATION</b>                           | indoor                                                  |
| <b>INSTALLATION</b>                       | Ceiling Recessed                                        |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | rectangle - 112 x 20                                    |
| <b>RECESSED DEPTH (MM)</b>                | 50                                                      |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | min.8                                                   |
| <b>INGRESS PROTECTION</b>                 | IP20                                                    |
| <b>WEIGHT (KG)</b>                        | 0.2                                                     |
| <b>ADJUSTABILITY</b>                      | non adjustable                                          |
| <b>INFORMATION</b>                        | 6 x REFLECTOR WFL-56°<br>EXCL.LED POWER SUPPLY 350mA-DC |

### Electrical info

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>CLASS</b>        | III                                        |
| <b>DIM TYPE</b>     | depending on type of external power supply |
| <b>ENERGY CLASS</b> | E                                          |
| <b>CERTIFICATES</b> | CB, EAC, ENEC                              |

### Lightsource info

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                |
| <b>LIGHTSOURCE</b>                 | LED cluster 6,1W / CRI>90 (R9: 50) / 3000K / 683lm |
| <b>TM-30 VALUES</b>                | Rf: 90 / Rg: 101                                   |
| <b>SDCM</b>                        | SDCM3                                              |
| <b>LM80</b>                        | L80 > 60000                                        |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 683lm // 6,1W // 112lm/W                           |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 486lm // 7W // 69lm/W                              |

### Requirements

LED POWER SUPPLY 350mA-DC DIM

For detailed installation instructions, please consult the manual: [424\\_211\\_06\\_XXX\\_HAND.pdf](#)










**DOT.COM S6 ST 93059 W-B**

424 211 06 933 W-B

**CEILING COMPATIBILITY**


| Ceiling Type                                                                                        | Mounting Kit |
|-----------------------------------------------------------------------------------------------------|--------------|
|  System ceiling     | -            |
|  Plasterboard       | -            |
|  Wood               | -            |
|  Concrete           | -            |
|  Concrete + plaster | -            |
|  Stretched ceiling  | -            |

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                   |                                          | #                                |
|------------------------------------------------------------------------------------|-------------------|------------------------------------------|----------------------------------|
|    | <b>300 90 63</b>  | LED POWER SUPPLY MULTI-POWER DIM9        | 1->4(4) <input type="checkbox"/> |
|    | <b>300 90 68</b>  | LED POWER SUPPLY MULTI-POWER DIM5        | 1->2(2) <input type="checkbox"/> |
|    | <b>300 90 69</b>  | LED POWER SUPPLY MULTI-POWER HV DIM9     | 2->6(6) <input type="checkbox"/> |
|  | <b>300 90 124</b> | LED POWER SUPPLY MULTI-POWER DIM7        | 1->2(2) <input type="checkbox"/> |
|  | <b>300 90 125</b> | LED POWER SUPPLY MULTI-POWER MINI DIM5   | 1->2(2) <input type="checkbox"/> |
|  | <b>21012 0010</b> | LED POWER SUPPLY MULTI POWER             | 1->2 <input type="checkbox"/>    |
|  | <b>21012 0021</b> | LED POWER SUPPLY MULTI POWER DIM1        | 1->3 <input type="checkbox"/>    |
|  | <b>21012 0035</b> | LED POWER SUPPLY MULTI POWER DIM5        | 1->3 <input type="checkbox"/>    |
|  | <b>21012 005W</b> | LED POWER SUPPLY MULTI-POWER COMPACT WDL | 1->3 <input type="checkbox"/>    |


DOT.COM S6 ST 93059 W-B

424 211 06 933 W-B




**21012 0258** LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

1 ☐




**21012 0268** LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

2->2 ☐




**21012 0298** LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->2 ☐



**21012 0308** LED POWER SUPPLY 350mA / 7,35W DIM8

1 ☐



**21032 0295** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->2 ☐

Notes:



## DOT.COM L2 ST 93016 B-MMAT

424 213 02 931 B-MMAT

AVAILABLE IN

**BLACK-BLACK** 424 213 02 931 B-B



**BLACK-CHROMED** 424 213 02 931 B-C

**BLACK-GOLD MATT** 424 213 02 931 B-MMAT

**WHITE-BLACK** 424 213 02 931 W-B

**WHITE-CHROMED** 424 213 02 931 W-C

**WHITE-GOLD MATT** 424 213 02 931 W-MMAT



[View on website](#)

### General info

|                                           |                                                             |
|-------------------------------------------|-------------------------------------------------------------|
| <b>LOCATION</b>                           | indoor                                                      |
| <b>INSTALLATION</b>                       | Ceiling Recessed                                            |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | rectangle - 84 x 40                                         |
| <b>RECESSED DEPTH (MM)</b>                | 62                                                          |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | max.30                                                      |
| <b>INGRESS PROTECTION</b>                 | IP20                                                        |
| <b>WEIGHT (KG)</b>                        | 0.3                                                         |
| <b>ADJUSTABILITY</b>                      | non adjustable                                              |
| <b>INFORMATION</b>                        | 2 x REFLECTOR SP-16°<br>EXCL.LED POWER SUPPLY 500-1050mA-DC |

### Electrical info

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>CLASS</b>        | III                                        |
| <b>DIM TYPE</b>     | depending on type of external power supply |
| <b>ENERGY CLASS</b> | F                                          |
| <b>CERTIFICATES</b> | CB, EAC, ENEC                              |

### Lightsource info

|                                    |                                                            |
|------------------------------------|------------------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                        |
| <b>LIGHTSOURCE</b>                 | LED cluster 2,8-6,3W / CRI>90 (R9: 50) / 3000K / 324-613lm |
| <b>TM-30 VALUES</b>                | Rf: 90 / Rg: 101                                           |
| <b>SDCM</b>                        | SDCM3                                                      |
| <b>RISKGROUP</b>                   | RG2                                                        |
| <b>LM80</b>                        | L80 > 60000                                                |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 613lm // 6,3W // 97lm/W                                    |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 505lm // 7W // 70lm/W                                      |

### Requirements

LED POWER SUPPLY 500 / 1050mA-DC DIM










**DOT.COM L2 ST 93016 B-MMAT**  
 424 213 02 931 B-MMAT

For detailed installation instructions, please consult the manual: [424\\_213\\_02\\_XXX\\_HAND.pdf](#)

**CEILING COMPATIBILITY**








| Ceiling Type                                                                                                | Mounting Kit |
|-------------------------------------------------------------------------------------------------------------|--------------|
|  <b>System ceiling</b>      | -            |
|  <b>Plasterboard</b>        | -            |
|  <b>Stucanet</b>            | -            |
|  <b>Wood</b>               | -            |
|  <b>Stretched ceiling</b> | -            |

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                                                          |                                | #                        |
|------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------------|--------------------------|
|    | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9       | 1->12(12) / 1->12(9) / 1->9(6) | <input type="checkbox"/> |
|    | <b>300 90 68</b> LED POWER SUPPLY MULTI-POWER DIM5       | 1->8(5) / 1->7(3)              | <input type="checkbox"/> |
|    | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7      | 1->6(5) / 1->4(3)              | <input type="checkbox"/> |
|  | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5 | 1->6(5) / 1->4(3)              | <input type="checkbox"/> |
|  | <b>300 90 136</b> LED POWER SUPPLY MULTI-POWER HC DIM9   | 1->7(6) / 1->19(13) / 1->14(9) | <input type="checkbox"/> |
|  | <b>300 90 148</b> LED POWER SUPPLY 1050mA-DC / 22W       | 1->3(1)                        | <input type="checkbox"/> |
|  | <b>21012 0010</b> LED POWER SUPPLY MULTI POWER           | 2->7 / 2->7 / 2->6             | <input type="checkbox"/> |
|  | <b>21012 0021</b> LED POWER SUPPLY MULTI POWER DIM1      | 2->9 / 2->8 / 2->6             | <input type="checkbox"/> |
|  | <b>21012 0035</b> LED POWER SUPPLY MULTI POWER DIM5      | 2->9 / 2->9 / 2->6             | <input type="checkbox"/> |

DOT.COM L2 ST 93016 B-MMAT

424 213 02 931 B-MMAT


|                                                                                    |                                                                      |                                             |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------|
|    | <b>21012 005W</b> LED POWER SUPPLY MULTI-POWER COMPACT WDL           | 2->9 / 2->8 / 2->6 <input type="checkbox"/> |
|    | <b>21012 0278</b> LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8    | 3->4 / 3->4 <input type="checkbox"/>        |
|    | <b>21012 0288</b> LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8    | 6->9 / 6->8 <input type="checkbox"/>        |
|    | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8    | 2->6 / 2->4 <input type="checkbox"/>        |
|  | <b>21012 0318</b> LED POWER SUPPLY 500mA / 10W DIM8                  | 3->3 <input type="checkbox"/>               |
|  | <b>21032 0305</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1->7 <input type="checkbox"/>               |
|  | <b>21032 0315</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 | 1->7 <input type="checkbox"/>               |

Notes:



DOT.COM L4 ST 93046 W-C  
424 213 04 933 W-C

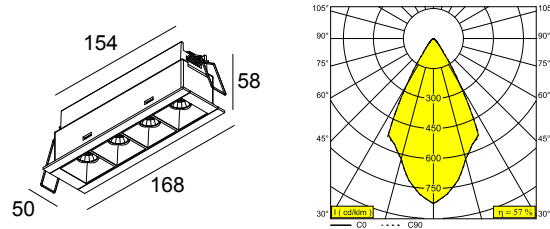AVAILABLE IN  
**BLACK-BLACK** 424 213 04 933 B-B  
**BLACK-CHROMED** 424 213 04 933 B-C  
**BLACK-GOLD MATT** 424 213 04 933 B-MMAT  
**WHITE-BLACK** 424 213 04 933 W-B  
**WHITE-CHROMED** 424 213 04 933 W-C  
**WHITE-GOLD MATT** 424 213 04 933 W-MMAT



 [View on website](#)

| General info                       |                                                              |
|------------------------------------|--------------------------------------------------------------|
| LOCATION                           | indoor                                                       |
| INSTALLATION                       | Ceiling Recessed                                             |
| CUTOUT SHAPE/SIZE (MM)             | rectangle - 158 x 40                                         |
| RECESSED DEPTH (MM)                | 62                                                           |
| THICKNESS OF MOUNTING SURFACE (MM) | max.30                                                       |
| INGRESS PROTECTION                 | IP20                                                         |
| WEIGHT (KG)                        | 0.4                                                          |
| ADJUSTABILITY                      | non adjustable                                               |
| INFORMATION                        | 4 x REFLECTOR WFL-46°<br>EXCL.LED POWER SUPPLY 500-1050mA-DC |

| Electrical info |                                            |
|-----------------|--------------------------------------------|
| CLASS           | III                                        |
| DIM TYPE        | depending on type of external power supply |
| ENERGY CLASS    | F                                          |
| CERTIFICATES    | CB, EAC, ENEC                              |

| Lightsource info            |                                                              |
|-----------------------------|--------------------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                          |
| LIGHTSOURCE                 | LED cluster 5,7-12,6W / CRI>90 (R9: 50) / 3000K / 648-1226lm |
| TM-30 VALUES                | Rf: 90 / Rg: 101                                             |
| SDCM                        | SDCM3                                                        |
| RISKGROUP                   | RG2                                                          |
| LM80                        | L80 > 60000                                                  |
| LED TECHNICS (LIGHT SOURCE) | 1226lm // 12,6W // 97lm/W                                    |
| LED TECHNICS (LUMINAIRE)    | 704lm // 14W // 49lm/W                                       |

| Requirements                         |  |
|--------------------------------------|--|
| LED POWER SUPPLY 500 / 1050mA-DC DIM |  |










DOT.COM L4 ST 93046 W-C  
424 213 04 933 W-C

For detailed installation instructions, please consult the manual: [424\\_213\\_04\\_XXX\\_HAND.pdf](#)

CEILING COMPATIBILITY








| Ceiling Type                                                                                         | Mounting Kit |
|------------------------------------------------------------------------------------------------------|--------------|
|  System ceiling      | -            |
|  Plasterboard        | -            |
|  Stucanet            | -            |
|  Wood               | -            |
|  Stretched ceiling | -            |

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                                                          |                             | #                        |
|------------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------------|--------------------------|
|    | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9       | 1->6(6) / 1->6(4) / 1->4(3) | <input type="checkbox"/> |
|    | <b>300 90 68</b> LED POWER SUPPLY MULTI-POWER DIM5       | 1->4(2) / 1->3(1)           | <input type="checkbox"/> |
|    | <b>300 90 69</b> LED POWER SUPPLY MULTI-POWER HV DIM9    | 1->9(6) / 1->7(4)           | <input type="checkbox"/> |
|  | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7      | 1->3(2) / 1->2(1)           | <input type="checkbox"/> |
|  | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5 | 1->3(2) / 1->2(1)           | <input type="checkbox"/> |
|  | <b>300 90 136</b> LED POWER SUPPLY MULTI-POWER HC DIM9   | 1->3(3)                     | <input type="checkbox"/> |
|  | <b>300 90 148</b> LED POWER SUPPLY 1050mA-DC / 22W       | 1(0)                        | <input type="checkbox"/> |
|  | <b>21012 0010</b> LED POWER SUPPLY MULTI POWER           | 1->3 / 1->3 / 1->3          | <input type="checkbox"/> |
|  | <b>21012 0021</b> LED POWER SUPPLY MULTI POWER DIM1      | 1->4 / 1->4 / 1->3          | <input type="checkbox"/> |

DOT.COM L4 ST 93046 W-C

424 213 04 933 W-C

|                                                                                    |                                                                      |                                             |
|------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------|
|    | <b>21012 0035</b> LED POWER SUPPLY MULTI POWER DIM5                  | 1->4 / 1->4 / 1->3 <input type="checkbox"/> |
|    | <b>21012 005W</b> LED POWER SUPPLY MULTI-POWER COMPACT WDL           | 1->4 / 1->4 / 1->3 <input type="checkbox"/> |
|    | <b>21012 0278</b> LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8    | 2->2 / 3->4 <input type="checkbox"/>        |
|    | <b>21012 0288</b> LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8    | 3->4 / 3->4 <input type="checkbox"/>        |
|  | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8    | 1->3 / 1->2 <input type="checkbox"/>        |
|  | <b>21032 0305</b> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 | 1->3 <input type="checkbox"/>               |
|  | <b>21032 0315</b> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 | 1->3 <input type="checkbox"/>               |

Notes:



## DOT.COM M4 ST OK 93032 B-C

424 222 04 932 B-C

AVAILABLE IN

**BLACK-BLACK** 424 222 04 932 B-B



**BLACK-CHROMED** 424 222 04 932 B-C

**BLACK-GOLD MATT** 424 222 04 932 B-MMAT

**WHITE-BLACK** 424 222 04 932 W-B

**WHITE-CHROMED** 424 222 04 932 W-C

**WHITE-GOLD MATT** 424 222 04 932 W-MMAT



[View on website](#)

### General info

|                                           |                                                        |
|-------------------------------------------|--------------------------------------------------------|
| <b>LOCATION</b>                           | indoor                                                 |
| <b>INSTALLATION</b>                       | Ceiling Recessed                                       |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | rectangle - 136 x 40                                   |
| <b>RECESSED DEPTH (MM)</b>                | 58                                                     |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | max.25                                                 |
| <b>INGRESS PROTECTION</b>                 | IP20                                                   |
| <b>WEIGHT (KG)</b>                        | 0.3                                                    |
| <b>ADJUSTABILITY</b>                      | 30° swiveling                                          |
| <b>INFORMATION</b>                        | 4 x REFLECTOR FL-32°<br>EXCL.LED POWER SUPPLY 500mA-DC |

### Electrical info

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>CLASS</b>        | III                                        |
| <b>DIM TYPE</b>     | depending on type of external power supply |
| <b>ENERGY CLASS</b> | E                                          |
| <b>CERTIFICATES</b> | CB, EAC, ENEC                              |

### Lightsource info

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                |
| <b>LIGHTSOURCE</b>                 | LED cluster 5,7W / CRI>90 (R9: 50) / 3000K / 648lm |
| <b>TM-30 VALUES</b>                | Rf: 90 / Rg: 101                                   |
| <b>SDCM</b>                        | SDCM3                                              |
| <b>RISKGROUP</b>                   | RG2                                                |
| <b>LM80</b>                        | L80 > 60000                                        |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 648lm // 5,7W // 114lm/W                           |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 474lm // 7W // 72lm/W                              |

### Requirements

LED POWER SUPPLY 500mA-DC DIM










**DOT.COM M4 ST OK 93032 B-C**  
 424 222 04 932 B-C

For detailed installation instructions, please consult the manual: [424\\_222\\_04\\_XXX\\_HAND.pdf](#)

**CEILING COMPATIBILITY**


| Ceiling Type                                                                                                | Mounting Kit |
|-------------------------------------------------------------------------------------------------------------|--------------|
|  <b>System ceiling</b>      | -            |
|  <b>Plasterboard</b>        | -            |
|  <b>Stucanet</b>            | -            |
|  <b>Wood</b>               | -            |
|  <b>Stretched ceiling</b> | -            |

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                                                            |         | #                        |
|------------------------------------------------------------------------------------|------------------------------------------------------------|---------|--------------------------|
|    | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9         | 1->6(6) | <input type="checkbox"/> |
|    | <b>300 90 68</b> LED POWER SUPPLY MULTI-POWER DIM5         | 1->4(2) | <input type="checkbox"/> |
|    | <b>300 90 69</b> LED POWER SUPPLY MULTI-POWER HV DIM9      | 1->9(6) | <input type="checkbox"/> |
|  | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7        | 1->3(2) | <input type="checkbox"/> |
|  | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5   | 1->3(2) | <input type="checkbox"/> |
|  | <b>21012 0010</b> LED POWER SUPPLY MULTI POWER             | 1->3    | <input type="checkbox"/> |
|  | <b>21012 0021</b> LED POWER SUPPLY MULTI POWER DIM1        | 1->4    | <input type="checkbox"/> |
|  | <b>21012 0035</b> LED POWER SUPPLY MULTI POWER DIM5        | 1->4    | <input type="checkbox"/> |
|  | <b>21012 005W</b> LED POWER SUPPLY MULTI-POWER COMPACT WDL | 1->4    | <input type="checkbox"/> |


**DOT.COM M4 ST OK 93032 B-C**

424 222 04 932 B-C




**21012 0278** LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

2->2

☐


**21012 0288** LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

3->4

☐

**21012 0298** LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->3

☐

**21032 0305** LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3

☐



Notes:



## DOT.COM L WALLWASH 02 ST 927 HO W-B

424 242 02 92 W-B

AVAILABLE IN  
**WHITE-BLACK** 424 242 02 92 W-B



[View on website](#)



### General info

|                                           |                                |
|-------------------------------------------|--------------------------------|
| <b>LOCATION</b>                           | indoor                         |
| <b>INSTALLATION</b>                       | Ceiling Recessed               |
| <b>CUTOUT SHAPE/SIZE (MM)</b>             | rectangle - 220 x 40           |
| <b>RECESSED DEPTH (MM)</b>                | 50                             |
| <b>THICKNESS OF MOUNTING SURFACE (MM)</b> | min.10                         |
| <b>INGRESS PROTECTION</b>                 | IP20                           |
| <b>WEIGHT (KG)</b>                        | 0.5                            |
| <b>ADJUSTABILITY</b>                      | non adjustable                 |
| <b>INFORMATION</b>                        | EXCL.LED POWER SUPPLY 350mA-DC |

### Electrical info

|                     |                           |
|---------------------|---------------------------|
| <b>CLASS</b>        | III                       |
| <b>DIM TYPE</b>     | depending on power supply |
| <b>ENERGY CLASS</b> | F                         |
| <b>CERTIFICATES</b> | CB, EAC, ENEC             |

### Lightsource info

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                |
| <b>LIGHTSOURCE</b>                 | LED cluster 9,6W / CRI>90 (R9: 63) / 2700K / 998lm |
| <b>TM-30 VALUES</b>                | Rf: 89 / Rg: 96                                    |
| <b>SDCM</b>                        | SDCM3                                              |
| <b>LM80</b>                        | L70 > 60000                                        |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 998lm // 9,6W // 104lm/W                           |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 543lm // 11W // 49lm/W                             |

### Requirements

LED POWER SUPPLY 350mA-DC DIM

For detailed installation instructions, please consult the manual: [424\\_242\\_02\\_XX\\_HAND.pdf](#)










**DOT.COM L WALLWASH 02 ST 927 HO W-B**  
 424 242 02 92 W-B

CEILING COMPATIBILITY





| Ceiling Type                                                                                                         | Mounting Kit |
|----------------------------------------------------------------------------------------------------------------------|--------------|
|  <b>System ceiling</b>               | -            |
|  <b>Plasterboard</b>                 | -            |
|  <b>Stucanet</b>                     | -            |
|  <b>Wood</b>                         | -            |
|  <b>Concrete</b>                     | -            |
|  <b>Concrete + plaster</b>           | -            |
|  <b>Lintel + plaster</b>           | -            |
|  <b>Hollow-core slab</b>           | -            |
|  <b>Hollow-core slab + plaster</b> | -            |
|  <b>Stretched ceiling</b>          | -            |

**DOT.COM L WALLWASH 02 ST 927 HO W-B**  
 424 242 02 92 W-B

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                                                            |         | #                        |
|------------------------------------------------------------------------------------|------------------------------------------------------------|---------|--------------------------|
|    | <b>300 90 63</b> LED POWER SUPPLY MULTI-POWER DIM9         | 1->2(2) | <input type="checkbox"/> |
|    | <b>300 90 68</b> LED POWER SUPPLY MULTI-POWER DIM5         | 1(1)    | <input type="checkbox"/> |
|    | <b>300 90 69</b> LED POWER SUPPLY MULTI-POWER HV DIM9      | 1->3(3) | <input type="checkbox"/> |
|  | <b>300 90 124</b> LED POWER SUPPLY MULTI-POWER DIM7        | 1(1)    | <input type="checkbox"/> |
|  | <b>300 90 125</b> LED POWER SUPPLY MULTI-POWER MINI DIM5   | 1(1)    | <input type="checkbox"/> |
|  | <b>21012 0010</b> LED POWER SUPPLY MULTI POWER             | 1       | <input type="checkbox"/> |
|  | <b>21012 0021</b> LED POWER SUPPLY MULTI POWER DIM1        | 1       | <input type="checkbox"/> |
|  | <b>21012 0035</b> LED POWER SUPPLY MULTI POWER DIM5        | 1       | <input type="checkbox"/> |
|  | <b>21012 005W</b> LED POWER SUPPLY MULTI-POWER COMPACT WDL | 1       | <input type="checkbox"/> |

**DOT.COM L WALLWASH 02 ST 927 HO W-B**  
 424 242 02 92 W-B

|                                                                                  |                                                                      |                            |
|----------------------------------------------------------------------------------|----------------------------------------------------------------------|----------------------------|
|  | <b>21012 0258</b> LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8    | 1 <input type="checkbox"/> |
|  | <b>21012 0268</b> LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8    | 1 <input type="checkbox"/> |
|  | <b>21012 0298</b> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8    | 1 <input type="checkbox"/> |
|  | <b>21032 0295</b> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 | 1 <input type="checkbox"/> |

Notes:

## DOT.COM M4 TRIMLESS 93014 C



424 512 04 931 C

AVAILABLE IN

**BLACK** 424 512 04 931 B

**CHROMED** 424 512 04 931 C

**GOLD MATT** 424 512 04 931 MMAT



[View on website](#)

### General info

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| <b>LOCATION</b>               | indoor                                                 |
| <b>INSTALLATION</b>           | Ceiling Recessed                                       |
| <b>CUTOUT SHAPE/SIZE (MM)</b> | rectangle - KIT                                        |
| <b>RECESSED DEPTH (MM)</b>    | 60                                                     |
| <b>INGRESS PROTECTION</b>     | IP20                                                   |
| <b>WEIGHT (KG)</b>            | 0.2                                                    |
| <b>ADJUSTABILITY</b>          | non adjustable                                         |
| <b>INFORMATION</b>            | 4 x REFLECTOR SP-14°<br>EXCL.LED POWER SUPPLY 500mA-DC |

### Electrical info

|                     |                                            |
|---------------------|--------------------------------------------|
| <b>CLASS</b>        | III                                        |
| <b>DIM TYPE</b>     | depending on type of external power supply |
| <b>ENERGY CLASS</b> | E                                          |
| <b>CERTIFICATES</b> | CB, EAC, ENEC                              |

### Lightsource info

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| <b>LIGHTSOURCE NAME</b>            | LED                                                |
| <b>LIGHTSOURCE</b>                 | LED cluster 5,7W / CRI>90 (R9: 50) / 3000K / 648lm |
| <b>TM-30 VALUES</b>                | Rf: 90 / Rg: 101                                   |
| <b>SDCM</b>                        | SDCM3                                              |
| <b>RISKGROUP</b>                   | RG2                                                |
| <b>LM80</b>                        | L80 > 60000                                        |
| <b>LED TECHNICS (LIGHT SOURCE)</b> | 648lm // 5,7W // 114lm/W                           |
| <b>LED TECHNICS (LUMINAIRE)</b>    | 473lm // 7W // 72lm/W                              |

### Requirements

MOUNTING KIT DOT.COM M4 TRIMLESS  
LED POWER SUPPLY 500mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual: [424\\_512\\_04\\_XXX\\_HAND.pdf](#)










DOT.COM M4 TRIMLESS 93014 C

424 512 04 931 C

CEILING COMPATIBILITY


| Ceiling Type                                                                                                       | Mounting Kit                                                                                                            |          |
|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------|
|  <b>Plasterboard</b>               |  MOUNTING KIT DOT.COM M4 TRIMLESS      | Required |
|  <b>Stucanet</b>                   |  MOUNTING KIT DOT.COM M4 TRIMLESS      | Required |
|  <b>Concrete + plaster</b>         |  MOUNTING KIT DOT.COM M4 TRIMLESS      | Required |
|  <b>Lintel + plaster</b>           |  MOUNTING KIT DOT.COM M4 TRIMLESS      | Required |
|  <b>Hollow-core slab + plaster</b> |  MOUNTING KIT DOT.COM M4 TRIMLESS      | Required |
|  <b>Stretched ceiling</b>          |  MOUNTING KIT DOT.COM M4 TRIMLESS CSC  | Required |
|                                                                                                                    |  MOUNTING KIT DOT.COM M4 TRIMLESS WSC | Required |

FINISH YOUR SPECIFICATION

| LED power supplies                                                                 |                   |                                          | #                                |
|------------------------------------------------------------------------------------|-------------------|------------------------------------------|----------------------------------|
|    | <b>300 90 63</b>  | LED POWER SUPPLY MULTI-POWER DIM9        | 1->6(6) <input type="checkbox"/> |
|    | <b>300 90 68</b>  | LED POWER SUPPLY MULTI-POWER DIM5        | 1->4(2) <input type="checkbox"/> |
|    | <b>300 90 69</b>  | LED POWER SUPPLY MULTI-POWER HV DIM9     | 1->9(6) <input type="checkbox"/> |
|  | <b>300 90 124</b> | LED POWER SUPPLY MULTI-POWER DIM7        | 1->3(2) <input type="checkbox"/> |
|  | <b>300 90 125</b> | LED POWER SUPPLY MULTI-POWER MINI DIM5   | 1->3(2) <input type="checkbox"/> |
|  | <b>21012 0010</b> | LED POWER SUPPLY MULTI POWER             | 1->3 <input type="checkbox"/>    |
|  | <b>21012 0021</b> | LED POWER SUPPLY MULTI POWER DIM1        | 1->4 <input type="checkbox"/>    |
|  | <b>21012 0035</b> | LED POWER SUPPLY MULTI POWER DIM5        | 1->4 <input type="checkbox"/>    |
|  | <b>21012 005W</b> | LED POWER SUPPLY MULTI-POWER COMPACT WDL | 1->4 <input type="checkbox"/>    |


## DOT.COM M4 TRIMLESS 93014 C

424 512 04 931 C




**21012 0278** LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

2->2




**21012 0288** LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

3->4



**21012 0298** LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->3




**21032 0305** LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3




### Mounting kits




**424 512 04 00** MOUNTING KIT DOT.COM M4 TRIMLESS



### Mounting kits stretched ceiling



**15212 0110** MOUNTING KIT DOT.COM M4 TRIMLESS CSC



**15212 0180** MOUNTING KIT DOT.COM M4 TRIMLESS WSC



**DOT.COM M4 TRIMLESS 93014 C**

424 512 04 931 C

Notes: