





iMAX II ROUND ADJUSTABLE LP
92720 B
 24210 9220 B

AVAILABLE IN
BLACK 24210 9220 B
WHITE 24210 9220 W




[View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	125
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-20° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 702-974lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	974lm // 8,6W // 113lm/W
LED TECHNICS (LUMINAIRE)	765lm // 10W // 77lm/W

Requirements	
iMAX II TUBE ROUND	
LED POWER SUPPLY 350 / 500mA-DC DIM	

Accessories	
iMAX II ACCESSOIRES	










iMAX II ROUND ADJUSTABLE LP 92720 B
 24210 9220 B

For detailed installation instructions, please consult the manual: [24210_XXXX_HAND.pdf](#)











CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	


imax II ROUND ADJUSTABLE LP 92720 B
24210 9220 B

LED power supplies		#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(3) ☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(2) / 1->2(1) ☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4) ☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(2) / 1->2(1) ☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(2) / 1->2(1) ☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1->2 / 1->2 ☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1->3 / 1->3 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1->3 / 1->3 ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->3 / 1->3 ☐

iMAX II ROUND ADJUSTABLE LP 92720 B
24210 9220 B

	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	2->2	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1->2 / 1->2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	1	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1 -> 2(2)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1 -> 2(1)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1->2	☐


iMAX II ROUND ADJUSTABLE LP 92720 B
24210 9220 B



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5


1->2 ☐

Light altering devices




24213 0050 B iMAX II HONEYCOMB B

☐



24213 0060 iMAX II GLASS SBL

☐




24213 0070 iMAX II LINEAR SPREAD LENS

☐



24213 0090 iMAX II SOFTENING LENS

☐





24213 0100 iMAX II SPREAD LENS

☐

iMAX II ROUND ADJUSTABLE LP 92720 B
24210 9220 B

Finish your product

	<u>24213 0010 B</u>	iMAX II TUBE ROUND B	☐
	<u>24213 0010 MMAT</u>	iMAX II TUBE ROUND MMAT	☐
	<u>24213 0010 W</u>	iMAX II TUBE ROUND W	☐
	<u>24213 0040 B</u>	iMAX II TUBE ROUND IP B	☐
	<u>24213 0040 MMAT</u>	iMAX II TUBE ROUND IP MMAT	☐
	<u>24213 0040 W</u>	iMAX II TUBE ROUND IP W	☐

Notes:





iMAX II ROUND ADJUSTABLE MP 92718 W

24211 9210 W

AVAILABLE IN

BLACK 24211 9210 B

WHITE 24211 9210 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	155
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-18° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-17,2W / CRI>90 (R9: 60) / 2700K / 1458-2009lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUPE	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2009lm // 17,2W // 117lm/W
LED TECHNICS (LUMINAIRE)	1387lm // 20W // 70lm/W

Requirements

iMAX II TUBE ROUND

LED POWER SUPPLY 350 / 500mA-DC DIM

Accessories

iMAX II ACCESSOIRES

iMAX II ROUND ADJUSTABLE MP 92718 W

24211 9210 W

For detailed installation instructions, please consult the manual: [24211_XXXX_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

iMAX II ROUND ADJUSTABLE MP 92718 W

24211 9210 W

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B










☐

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W







☐

imax II ROUND ADJUSTABLE MP 92718 W

24211 9210 W

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->2(2) / 1->2(2)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) / 1(0)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->3(3) / 1->3(2)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) / 1(0)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) / 1(0)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1 / 1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1 / 1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1 / 1	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1 / 1	☐





iMAX II ROUND ADJUSTABLE MP 92718 W
24211 9210 W

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐

iMAX II ROUND ADJUSTABLE MP 92718 W



24211 9210 W

Light altering devices

	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

iMAX II ROUND ADJUSTABLE MP 92718 W
24211 9210 W



Finish your product

	<u>24213 0010 B</u>	iMAX II TUBE ROUND B	☐
	<u>24213 0010 MMAT</u>	iMAX II TUBE ROUND MMAT	☐
	<u>24213 0010 W</u>	iMAX II TUBE ROUND W	☐
	<u>24213 0040 B</u>	iMAX II TUBE ROUND IP B	☐
	<u>24213 0040 MMAT</u>	iMAX II TUBE ROUND IP MMAT	☐
	<u>24213 0040 W</u>	iMAX II TUBE ROUND IP W	☐

Notes:



**iMAX II SQUARE ADJUSTABLE
TRIMLESS LP 92720**
24214 9220-S




[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
RECESSED DEPTH (MM)	160
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-20° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 702-974lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	974lm // 8,6W // 113lm/W
LED TECHNICS (LUMINAIRE)	794lm // 10W // 80lm/W

Requirements	
LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)	
MOUNTING KIT S102 TRIMLESS O.F.A.	
MOUNTING KIT S102 TRIMLESS	
iMAX II TUBE TRIMLESS	

Accessories	
iMAX II ACCESSOIRES	










imax II SQUARE ADJUSTABLE TRIMLESS LP 92720
24214 9220-S

For detailed installation instructions, please consult the manual: [24214_XXX0-S_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit
 System ceiling	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Plasterboard	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Concrete + plaster	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Lintel + plaster	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Hollow-core slab + plaster	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(3)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(2) / 1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(2) / 1->2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1->2 / 1->2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1->3 / 1->3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1->3 / 1->3	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->3 / 1->3	☐


iMAX II SQUARE ADJUSTABLE TRIMLESS LP 92720

24214 9220-S




21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

1

☐



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

2->2

☐



21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

1

☐



21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

2->2

☐



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->2 / 1->2

☐



21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8

1

☐



21012 0318 LED POWER SUPPLY 500mA / 10W DIM8

1

☐



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1 -> 2(2)

☐


21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1 -> 2(1)

☐



21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->2

☐

iMAX II SQUARE ADJUSTABLE TRIMLESS LP 92720

24214 9220-S




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->2



Mounting kits




400 92 00 MOUNTING KIT S102 TRIMLESS




400 92 00 OFA MOUNTING KIT S102 TRIMLESS O.F.A.




Light altering devices



24213 0050 B iMAX II HONEYCOMB B




24213 0060 iMAX II GLASS SBL



24213 0070 iMAX II LINEAR SPREAD LENS



24213 0090 iMAX II SOFTENING LENS




24213 0100 iMAX II SPREAD LENS



iMAX II SQUARE ADJUSTABLE TRIMLESS LP 92720
24214 9220-S



Finish your product

	<u>24213 0030 B</u>	iMAX II TUBE SQUARE TRIMLESS B	☐
	<u>24213 0030 MMAT</u>	iMAX II TUBE SQUARE TRIMLESS MMAT	☐
	<u>24213 0030 W</u>	iMAX II TUBE SQUARE TRIMLESS W	☐

Notes:



iMAX II ROUND ADJUSTABLE
TRIMLESS LP 93012
 24214 9310-R




[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	160
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-12° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 734-1018lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1018lm // 8,6W // 118lm/W
LED TECHNICS (LUMINAIRE)	809lm // 10W // 82lm/W

Requirements	
LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)	
MOUNTING KIT R102 TRIMLESS O.F.A.	
iMAX II TUBE TRIMLESS	

Accessories	
iMAX II ACCESSOIRES	

iMAX II ROUND ADJUSTABLE TRIMLESS LP 93012
24214 9310-R

For detailed installation instructions, please consult the manual: [24214_XXX0-R_HAND.pdf](#)









CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Plasterboard	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stretched ceiling	 MOUNTING KIT R102 TRIMLESS CSC	Required
	 MOUNTING KIT R102 TRIMLESS WSC	Required

 DELTALIGHT®


iMAX II ROUND ADJUSTABLE TRIMLESS LP 93012

24214 9310-R

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(3)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(2) / 1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(2) / 1->2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1->2 / 1->2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1->3 / 1->3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1->3 / 1->3	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->3 / 1->3	☐


imax II ROUND ADJUSTABLE TRIMLESS LP 93012

24214 9310-R




21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

1

☐



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

2->2

☐



21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

1

☐



21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

2->2

☐



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->2 / 1->2

☐



21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8

1

☐



21012 0318 LED POWER SUPPLY 500mA / 10W DIM8

1

☐



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1 -> 2(2)

☐


21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1 -> 2(1)

☐



21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->2

☐

iMAX II ROUND ADJUSTABLE TRIMLESS LP 93012

24214 9310-R




21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->2




Mounting kits



15212 2010 MOUNTING KIT R102 TRIMLESS O.F.A.



Mounting kits stretched ceiling



15212 0090 MOUNTING KIT R102 TRIMLESS CSC






15212 0170 MOUNTING KIT R102 TRIMLESS WSC




iMAX II ROUND ADJUSTABLE TRIMLESS LP 93012
 24214 9310-R

Light altering devices

	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

Finish your product

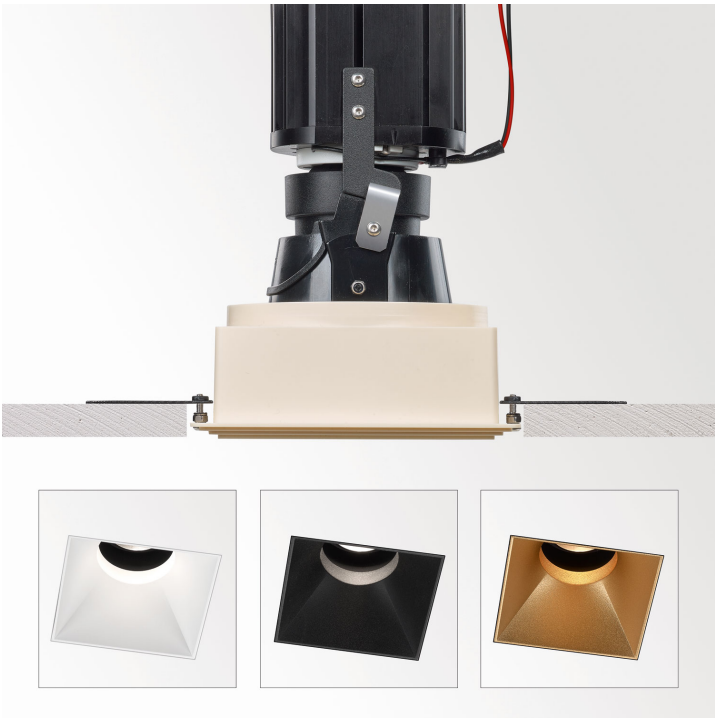
	24213 0020 B iMAX II TUBE ROUND TRIMLESS B	☐
	24213 0020 MMAT iMAX II TUBE ROUND TRIMLESS MMAT	☐
	24213 0020 W iMAX II TUBE ROUND TRIMLESS W	☐

Notes:





iMAX II ROUND ADJUSTABLE TRIMLESS LP 93012

24214 9310-R



**iMAX II SQUARE ADJUSTABLE
TRIMLESS MP 92726**
24215 9220-S




[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
RECESSED DEPTH (MM)	190
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-26° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-17,2W / CRI>90 (R9: 60) / 2700K / 1458-2009lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2009lm // 17,2W // 117lm/W
LED TECHNICS (LUMINAIRE)	1516lm // 20W // 77lm/W

Requirements	
LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)	
MOUNTING KIT S102 TRIMLESS O.F.A.	
MOUNTING KIT S102 TRIMLESS	
iMAX II TUBE TRIMLESS	

Accessories	
iMAX II ACCESSOIRES	

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 92726

24215 9220-S

For detailed installation instructions, please consult the manual: [24215_XXX0-S_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT S102 TRIMLESS	Required
	 MOUNTING KIT S102 TRIMLESS O.F.A.	Required
 Plasterboard	 MOUNTING KIT S102 TRIMLESS	Required
	 MOUNTING KIT S102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT S102 TRIMLESS	Required
	 MOUNTING KIT S102 TRIMLESS O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT S102 TRIMLESS	Required
	 MOUNTING KIT S102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT S102 TRIMLESS	Required
	 MOUNTING KIT S102 TRIMLESS O.F.A.	Required


iMAX II SQUARE ADJUSTABLE TRIMLESS MP 92726

24215 9220-S

FINISH YOUR SPECIFICATION

LED power supplies


#



300 90 63

LED POWER SUPPLY MULTI-POWER DIM9


1->2(2) / 1->2(2)

☐


300 90 68

LED POWER SUPPLY MULTI-POWER DIM5


1(1) / 1(0)

☐


300 90 69

LED POWER SUPPLY MULTI-POWER HV DIM9

1->3(3) / 1->3(2)

☐


300 90 124

LED POWER SUPPLY MULTI-POWER DIM7


1(1) / 1(0)

☐


300 90 125

LED POWER SUPPLY MULTI-POWER MINI DIM5


1(1) / 1(0)

☐


21012 0010

LED POWER SUPPLY MULTI POWER


1 / 1

☐


21012 0021

LED POWER SUPPLY MULTI POWER DIM1


1 / 1

☐


21012 0035

LED POWER SUPPLY MULTI POWER DIM5

1 / 1

☐









21012 005W

LED POWER SUPPLY MULTI-POWER COMPACT WDL



1 / 1

☐

iMAX II SQUARE ADJUSTABLE TRIMLESS MP 92726
24215 9220-S

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐





Mounting kits

	400 92 00 MOUNTING KIT S102 TRIMLESS		☐
	400 92 00 OFA MOUNTING KIT S102 TRIMLESS O.F.A.		☐


iMAX II SQUARE ADJUSTABLE TRIMLESS MP 92726

24215 9220-S

Light altering devices

	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

Finish your product

	24213 0030 B iMAX II TUBE SQUARE TRIMLESS B	☐
	24213 0030 MMAT iMAX II TUBE SQUARE TRIMLESS MMAT	☐
	24213 0030 W iMAX II TUBE SQUARE TRIMLESS W	☐

Notes:





iMAX II SQUARE ADJUSTABLE TRIMLESS MP 92726

24215 9220-S



iMAX II ROUND ADJUSTABLE TRIMLESS MP 92739

24215 9230-R



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	190
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-39° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-17,2W / CRI>90 (R9: 60) / 2700K / 1458-2009lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2009lm // 17,2W // 117lm/W
LED TECHNICS (LUMINAIRE)	1399lm // 20W // 71lm/W

Remarks

No HONEYCOMB, SPREAD LENS or LINEAR SPREAD LENS @ 500mA !

Requirements

LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)
MOUNTING KIT R102 TRIMLESS O.F.A.
iMAX II TUBE TRIMLESS

Accessories

iMAX II ACCESSOIRES

Delta Light NV may revise the information and technical data at any time without notice. Version: 12/12/2024


iMAX II ROUND ADJUSTABLE TRIMLESS MP 92739
 24215 9230-R

For detailed installation instructions, please consult the manual: [24215_XXX0-R_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Plasterboard	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stretched ceiling	 MOUNTING KIT R102 TRIMLESS CSC	Required
	 MOUNTING KIT R102 TRIMLESS WSC	Required

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B










9

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W








7

imax II ROUND ADJUSTABLE TRIMLESS MP 92739

24215 9230-R

LED power supplies			#
	300 90 63	LED POWER SUPPLY MULTI-POWER DIM9	1->2(2) / 1->2(2) ☐
	300 90 68	LED POWER SUPPLY MULTI-POWER DIM5	1(1) / 1(0) ☐
	300 90 69	LED POWER SUPPLY MULTI-POWER HV DIM9	1->3(3) / 1->3(2) ☐
	300 90 124	LED POWER SUPPLY MULTI-POWER DIM7	1(1) / 1(0) ☐
	300 90 125	LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) / 1(0) ☐
	21012 0010	LED POWER SUPPLY MULTI POWER	1 / 1 ☐
	21012 0021	LED POWER SUPPLY MULTI POWER DIM1	1 / 1 ☐
	21012 0035	LED POWER SUPPLY MULTI POWER DIM5	1 / 1 ☐
	21012 005W	LED POWER SUPPLY MULTI-POWER COMPACT WDL	1 / 1 ☐

iMAX II ROUND ADJUSTABLE TRIMLESS MP 92739
24215 9230-R

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐

Mounting kits



	15212 2010 MOUNTING KIT R102 TRIMLESS O.F.A.		☐
--	---	--	--------------------------







iMAX II ROUND ADJUSTABLE TRIMLESS MP 92739

24215 9230-R

Mounting kits stretched ceiling

	15212 0090 MOUNTING KIT R102 TRIMLESS CSC	☐
	15212 0170 MOUNTING KIT R102 TRIMLESS WSC	☐


Light altering devices

	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

iMAX II ROUND ADJUSTABLE TRIMLESS MP 92739

24215 9230-R

Finish your product

	<u>24213 0020 B</u>	iMAX II TUBE ROUND TRIMLESS B	☐
	<u>24213 0020 MMAT</u>	iMAX II TUBE ROUND TRIMLESS MMAT	☐
	<u>24213 0020 W</u>	iMAX II TUBE ROUND TRIMLESS W	☐



Notes:



iMAX II SQUARE ADJUSTABLE LP 92712 W

24217 9210 W

AVAILABLE IN
BLACK 24217 9210 B
WHITE 24217 9210 W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	125
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-12° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 702-974lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	974lm // 8,6W // 113lm/W
LED TECHNICS (LUMINAIRE)	692lm // 10W // 70lm/W

Requirements

iMAX II TUBE SQUARE
LED POWER SUPPLY 350 / 500mA-DC DIM

Accessories

iMAX II ACCESSOIRES

iMAX II SQUARE ADJUSTABLE LP 92712 W

24217 9210 W

For detailed installation instructions, please consult the manual: [24217_XXXX_HAND.pdf](#)


CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

iMAX II SQUARE ADJUSTABLE LP 92712 W
24217 9210 W

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B

☐










21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W

☐




iMAX II SQUARE ADJUSTABLE LP 92712 W

24217 9210 W

LED power supplies			#
	300 90 63	LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(3) ☐
	300 90 68	LED POWER SUPPLY MULTI-POWER DIM5	1->2(2) / 1->2(1) ☐
	300 90 69	LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4) ☐
	300 90 124	LED POWER SUPPLY MULTI-POWER DIM7	1->2(2) / 1->2(1) ☐
	300 90 125	LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(2) / 1->2(1) ☐
	21012 0010	LED POWER SUPPLY MULTI POWER	1->2 / 1->2 ☐
	21012 0021	LED POWER SUPPLY MULTI POWER DIM1	1->3 / 1->3 ☐
	21012 0035	LED POWER SUPPLY MULTI POWER DIM5	1->3 / 1->3 ☐
	21012 005W	LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->3 / 1->3 ☐


iMAX II SQUARE ADJUSTABLE LP 92712 W

24217 9210 W




21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

1

☐



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

2->2

☐



21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

1

☐



21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

2->2

☐



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->2 / 1->2

☐



21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8

1

☐



21012 0318 LED POWER SUPPLY 500mA / 10W DIM8

1

☐



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1 -> 2(2)

☐


21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1 -> 2(1)


☐


21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5





1->2

☐

iMAX II SQUARE ADJUSTABLE LP 92712 W
24217 9210 W

	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1->2 ☐
--	--	-------------------------------

Light altering devices

	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

Finish your product

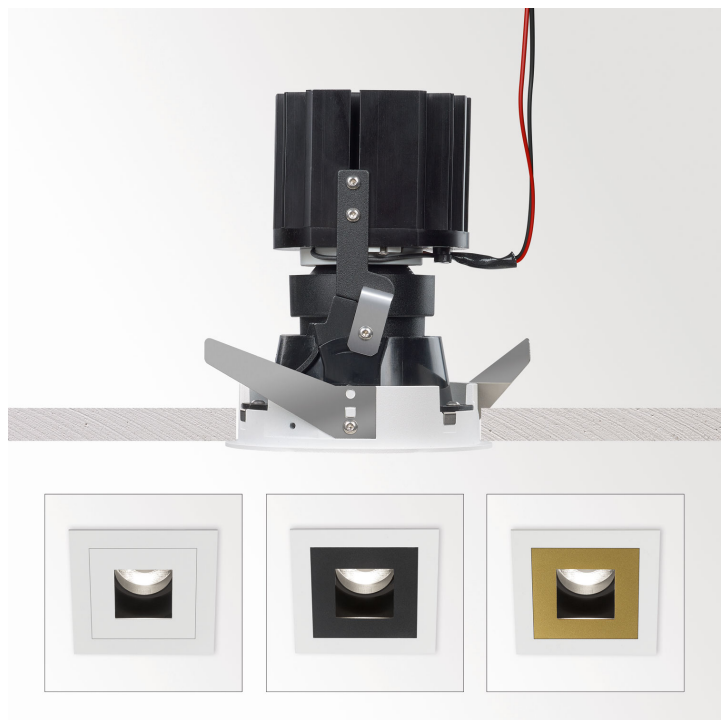
	24213 0080 B iMAX II TUBE SQUARE B	☐
	24213 0080 MMAT iMAX II TUBE SQUARE MMAT	☐
	24213 0080 W iMAX II TUBE SQUARE W	☐



iMAX II SQUARE ADJUSTABLE LP 92712 W

24217 9210 W



Notes:



iMAX II SQUARE ADJUSTABLE MP 92739 W

24218 9230 W

AVAILABLE IN
BLACK 24218 9230 B
WHITE 24218 9230 W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	155
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-39° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,6-17,2W / CRI>90 (R9: 60) / 2700K / 1458-2009lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUPE	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2009lm // 17,2W // 117lm/W
LED TECHNICS (LUMINAIRE)	1103lm // 20W // 56lm/W

Remarks

No HONEYCOMB, SPREAD LENS or LINEAR SPREAD LENS @ 500mA !

Requirements

iMAX II TUBE SQUARE
LED POWER SUPPLY 350 / 500mA-DC DIM

iMAX II SQUARE ADJUSTABLE MP 92739 W
 24218 9230 W

Accessories

iMAX II ACCESSOIRES

For detailed installation instructions, please consult the manual: [24218_XXXX_HAND.pdf](#)


CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

iMAX II SQUARE ADJUSTABLE MP 92739 W
24218 9230 W

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B










☐

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W







☐

imax II SQUARE ADJUSTABLE MP 92739 W

24218 9230 W





LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->2(2) / 1->2(2)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) / 1(0)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->3(3) / 1->3(2)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) / 1(0)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) / 1(0)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1 / 1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1 / 1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1 / 1	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1 / 1	☐

iMAX II SQUARE ADJUSTABLE MP 92739 W
24218 9230 W

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1	☐

iMAX II SQUARE ADJUSTABLE MP 92739 W
24218 9230 W

Light altering devices

	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

Finish your product

	24213 0080 B iMAX II TUBE SQUARE B	☐
	24213 0080 MMAT iMAX II TUBE SQUARE MMAT	☐
	24213 0080 W iMAX II TUBE SQUARE W	☐

Notes:



iMAX II SQUARE ADJUSTABLE MP 92739 W



24218 9230 W



iMAX II ROUND ADJUSTABLE CL 9276 B

24220 9210 B

AVAILABLE IN
BLACK 24220 9210 B
WHITE 24220 9210 W



 [View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	110
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-6° EXCL.LED POWER SUPPLY 700-1050mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2-3,2W / CRI>90 / 2700K / 201-280lm
SDCM	SDCM3
RISKGROUP	RG2 (threshold 0,6m)
LED TECHNICS (LIGHT SOURCE)	280lm // 3,2W // 88lm/W
LED TECHNICS (LUMINAIRE)	241lm // 4W // 65lm/W

Requirements	
iMAX II TUBE ROUND	
LED POWER SUPPLY 700 / 1050mA-DC DIM	

Accessories	
IMAX HONEYCOMB	

iMAX II ROUND ADJUSTABLE CL 9276 B
24220 9210 B









For detailed installation instructions, please consult the manual: [24220_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

imax II ROUND ADJUSTABLE CL 9276 B
24220 9210 B

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	2->15(6) / - / -	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	28(18) / - / -	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->9(6) / - / -	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->9(6) / - / -	☐
	300 90 136 LED POWER SUPPLY MULTI-POWER HC DIM9	- / 13(11) / -	☐
	300 90 148 LED POWER SUPPLY 1050mA-DC / 22W	6(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	2->16 / 2 -> 11 / -	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	2->14(7)	☐
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2->13	☐


iMAX II ROUND ADJUSTABLE CL 9276 B
24220 9210 B



21032 0385 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5

2->13 ☐


Light altering devices



400 03 01 B iMAX HONEYCOMB B

☐

Finish your product



24213 0010 B iMAX II TUBE ROUND B


☐

24213 0010 MMAT iMAX II TUBE ROUND MMAT

☐

24213 0010 W iMAX II TUBE ROUND W

☐



24213 0040 B iMAX II TUBE ROUND IP B

☐

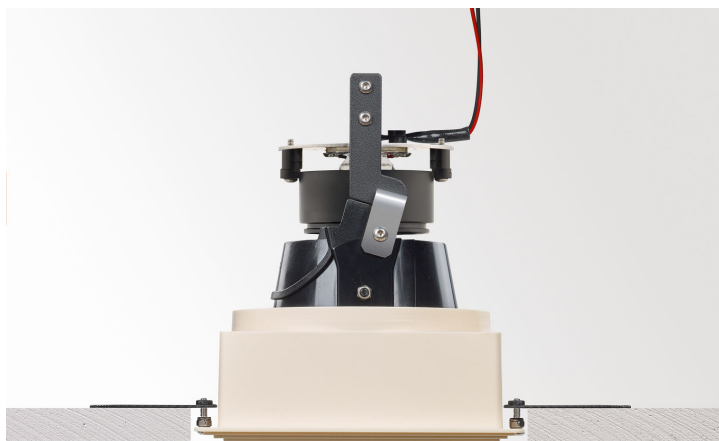
24213 0040 MMAT iMAX II TUBE ROUND IP MMAT

☐

24213 0040 W iMAX II TUBE ROUND IP W



☐

Notes:



iMAX II SQUARE ADJUSTABLE TRIMLESS CL 9276

24224 9210-S



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - KIT
RECESSED DEPTH (MM)	145
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-6° EXCL.LED POWER SUPPLY 700-1050mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2-3,2W / CRI>90 / 2700K / 201-280lm
SDCM	SDCM3
RISKGROUP	RG2 (threshold 0,6m)
LED TECHNICS (LIGHT SOURCE)	280lm // 3,2W // 88lm/W
LED TECHNICS (LUMINAIRE)	251lm // 4W // 68lm/W

Requirements

LED POWER SUPPLY 700 / 1050mA-DC DIM (Remote)
MOUNTING KIT S102 TRIMLESS O.F.A.
MOUNTING KIT S102 TRIMLESS
iMAX II TUBE TRIMLESS

Accessories

iMAX HONEYCOMB









iMAX II SQUARE ADJUSTABLE TRIMLESS CL 9276
 24224 9210-S

For detailed installation instructions, please consult the manual: [24224_XXX0-S_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit
 System ceiling	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Plasterboard	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Concrete + plaster	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Lintel + plaster	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required
 Hollow-core slab + plaster	 MOUNTING KIT S102 TRIMLESS Required
	 MOUNTING KIT S102 TRIMLESS O.F.A. Required

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 68	LED POWER SUPPLY MULTI-POWER DIM5	2->15(6) / - / - ☐
	300 90 69	LED POWER SUPPLY MULTI-POWER HV DIM9	28(18) / - / - ☐
	300 90 124	LED POWER SUPPLY MULTI-POWER DIM7	2->9(6) / - / - ☐
	300 90 125	LED POWER SUPPLY MULTI-POWER MINI DIM5	2->9(6) / - / - ☐
	300 90 136	LED POWER SUPPLY MULTI-POWER HC DIM9	- / 13(11) / - ☐
	300 90 148	LED POWER SUPPLY 1050mA-DC / 22W	6(3) ☐
	21012 005W	LED POWER SUPPLY MULTI-POWER COMPACT WDL	2->16 / 2 -> 11 / - ☐
	21012 0490	LED POWER SUPPLY 700mA-DC / 30W IP68	2->14(7) ☐
	21032 0315	LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2->13 ☐

iMAX II SQUARE ADJUSTABLE TRIMLESS CL 9276

24224 9210-S




21032 0385 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5

2->13



Mounting kits



400 92 00

MOUNTING KIT S102 TRIMLESS




400 92 00 OFA

MOUNTING KIT S102 TRIMLESS O.F.A.



Light altering devices




400 03 01 B

iMAX HONEYCOMB B



Finish your product



24213 0030 B

iMAX II TUBE SQUARE TRIMLESS B



24213 0030 MMAT

iMAX II TUBE SQUARE TRIMLESS MMAT



24213 0030 W

iMAX II TUBE SQUARE TRIMLESS W







iMAX II SQUARE ADJUSTABLE TRIMLESS CL 9276

24224 9210-S

Notes:



**iMAX II ROUND ADJUSTABLE
TRIMLESS CL 9306**
24224 9310-R




[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	145
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS SP-6° EXCL.LED POWER SUPPLY 700-1050mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2-3,2W / CRI>90 / 3000K / 229-319lm
SDCM	SDCM3
RISKGROUP	RG2 (threshold 0,6m)
LED TECHNICS (LIGHT SOURCE)	319lm // 3,2W // 100lm/W
LED TECHNICS (LUMINAIRE)	286lm // 4W // 78lm/W

Requirements	
LED POWER SUPPLY 700 / 1050mA-DC DIM (Remote)	
MOUNTING KIT R102 TRIMLESS O.F.A.	
iMAX II TUBE TRIMLESS	

Accessories	
IMAX HONEYCOMB	

iMAX II ROUND ADJUSTABLE TRIMLESS CL 9306
 24224 9310-R









For detailed installation instructions, please consult the manual: [24224_XXX0-R_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Plasterboard	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stretched ceiling	 MOUNTING KIT R102 TRIMLESS CSC	Required
	 MOUNTING KIT R102 TRIMLESS WSC	Required

iMAX II ROUND ADJUSTABLE TRIMLESS CL 9306
24224 9310-R

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	2->15(6) / - / -	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	28(18) / - / -	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->9(6) / - / -	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->9(6) / - / -	☐
	300 90 136 LED POWER SUPPLY MULTI-POWER HC DIM9	- / 13(11) / -	☐
	300 90 148 LED POWER SUPPLY 1050mA-DC / 22W	6(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	2->16 / 2 -> 11 / -	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	2->14(7)	☐
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	2->13	☐


iMAX II ROUND ADJUSTABLE TRIMLESS CL 9306
24224 9310-R



21032 0385 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W PRO DIM5

2->13 ☐


Mounting kits



15212 2010 MOUNTING KIT R102 TRIMLESS O.F.A.


☐

Mounting kits stretched ceiling



15212 0090 MOUNTING KIT R102 TRIMLESS CSC


☐



15212 0170 MOUNTING KIT R102 TRIMLESS WSC

☐

Light altering devices




400 03 01 B iMAX HONEYCOMB B

☐

iMAX II ROUND ADJUSTABLE TRIMLESS CL 9306
24224 9310-R

Finish your product

	<u>24213 0020 B</u>	iMAX II TUBE ROUND TRIMLESS B	☐
	<u>24213 0020 MMAT</u>	iMAX II TUBE ROUND TRIMLESS MMAT	☐
	<u>24213 0020 W</u>	iMAX II TUBE ROUND TRIMLESS W	☐

Notes: