


SANA.



TURN AND TILT.

This banana spotlight can be integrated in any retail setting or showroom, thanks to its flexibility in terms of rotation and tilting. The luminaire can be used as a downlight above neutral areas, and also as a spot above exhibited objects. This gives you the freedom to adjust the Sana according to your specific requirements.


SANA S HE.

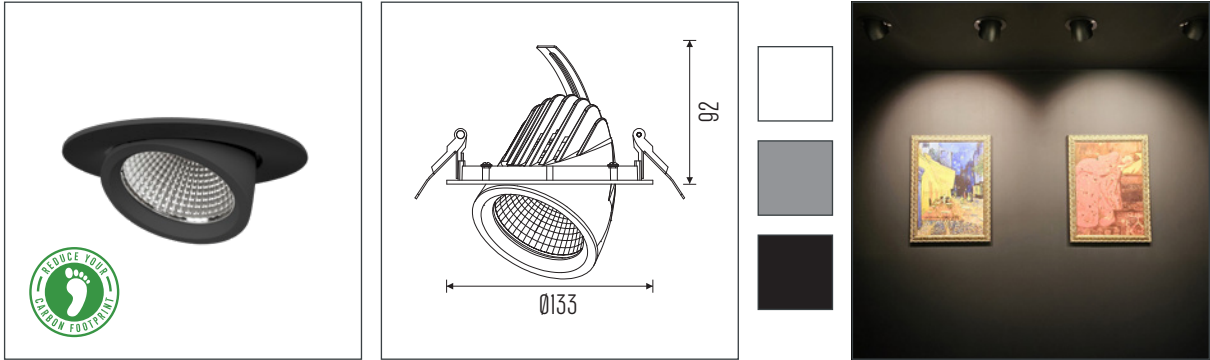


Adjustability	: 350° rotational and 50° tiltable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 125mm	Optic	: Facet Metalized Reflector 15°, 25°, 40°, 65°
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 2700lm	Net Weight [kg]	: 0.65kg
System Power [W]	: max. 19W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 142lm/W		




SANA M HE.

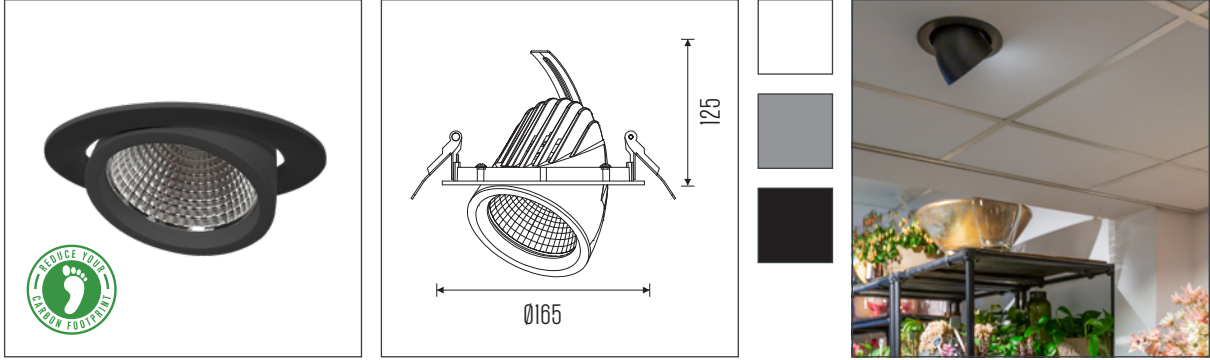

Adjustability	: 350° rotational and 50° tiltable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 155mm	Optic	: Facet Metalized Reflector 20°, 30°, 40°, 60°
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4000K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 5200lm	Net Weight [kg]	: 0.88kg
System Power [W]	: max. 40W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 147lm/W		




SANA L HE.

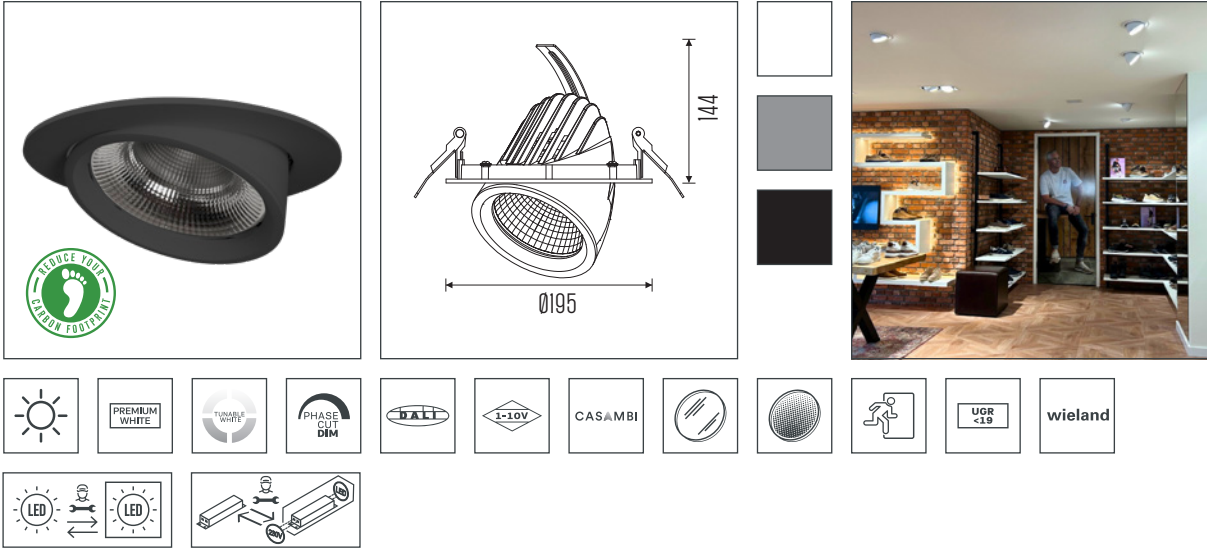

Adjustability	: 350° rotational and 50° tilttable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 185mm	Optic	: Facet Metalized Reflector 15°, 24°, 36°, 45°, 60°
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 5550lm	Net Weight [kg]	: 1.45kg
System Power [W]	: max. 46.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 147lm/W		

Go to full specs

SANA M.

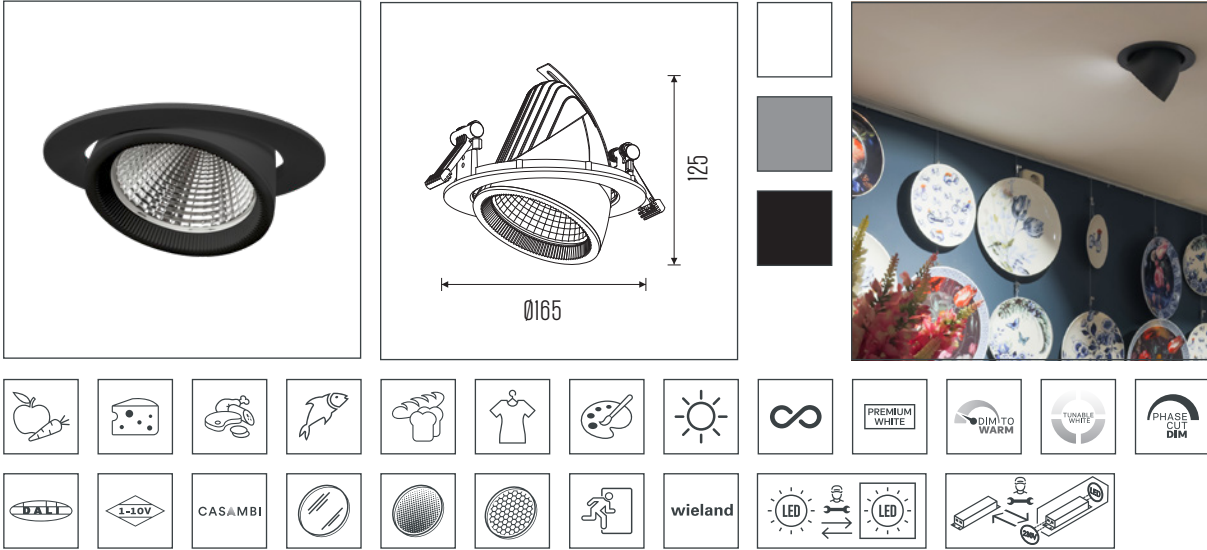

Adjustability	: 350° rotational and 50° tilttable	Electrical Safety Class	: Class II
Cut-Out [mm]	: Ø 155mm	Optic	: Facet Anodized Aluminum Reflector 15°, 30°, 45°, 60°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4500lm	Net Weight [kg]	: 0.88kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 137lm/W		

Go to full specs



HISTORY OF LIGHTING | HALLWAY