





SPLITBOX 2 SPY 52 92720 B

100070 9220 B

AVAILABLE IN
BLACK 100070 9220 B
WHITE 100070 9220 W



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 275 x 150
RECESSED DEPTH (MM)	180
THICKNESS OF MOUNTING SURFACE (MM)	max.12
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.8
INFORMATION	ADJUSTABLE 2 x REFLECTOR FL-20° EXCL.LED POWER SUPPLY 350-700mA-DC Optional REFLECTORS 30° & 45° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8-12,4W / CRI>90 (R9: 60) / 2700K / 753-1403lm)
RVALUES	rf: 89 / Rg: 100
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2806lm // 24,8W // 113lm/W
LED TECHNICS (LUMINAIRE)	1758lm // 29W // 62lm/W

Remarks

Max.500mA when using accessories

Requirements

SPY 52 TUBE
LED POWER SUPPLY 350 / 500 / 700mA-DC

SPLITBOX 2 SPY 52 92720 B
 100070 9220 B

Accessories

- HONEYCOMB 42
- SPREAD LENS 42
- LINEAR SPREAD LENS 42
- SOFTENING LENS 42
- GLASS SBL 42










For detailed installation instructions, please consult the manual: [100070_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-











SPLITBOX 2 SPY 52 92720 B
100070 9220 B

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->2(2) / 1->2(2) / 1->2(1)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) / 1(0,5) / 1(0,5)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->3(3) / 1->3(2) / 1->2(1)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) / 1(0,5) / 0,5(0,5)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) / 1(0,5) / 0,5(0,5)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1/1/1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1/1/1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1/1/1	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1/1/1	☐

SPLITBOX 2 SPY 52 92720 B


100070 9220 B

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1/1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	0,5 / 0,5	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1/1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1/1/0,5	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	0,5	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	0,5	☐
	21012 0328 LED POWER SUPPLY 700mA / 15W DIM8	0,5	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1(0,5)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0,5)	☐

 DELTALIGHT®


SPLITBOX 2 SPY 52 92720 B

100070 9220 B




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1 ☐



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5


1 ☐

Light altering devices




19810 0010 B HONEYCOMB 42 SINGLE USE B

☐



19810 0020 LINEAR SPREAD LENS 42

☐




19810 0030 SPREAD LENS 42

☐




19810 0040 SOFTENING LENS 42

☐



19810 0050 GLASS SBL 42

☐





19810 0060 B HONEYCOMB 42 DOUBLE USE B

☐

Finish your product

	40 19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐
	19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

	18 19810 0180 SPY 52 REFLECTOR 20°	☐
	18 19810 0190 SPY 52 REFLECTOR 45°	☐
	18 19810 0240 SPY 52 REFLECTOR 30°	☐



Notes:



SPLITBOX 2 SPY 52 93045 W

100070 9330 W

AVAILABLE IN
BLACK 100070 9330 B
WHITE 100070 9330 W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOOUT SHAPE/SIZE (MM)	rectangle - 275 x 150
RECESSED DEPTH (MM)	180
THICKNESS OF MOUNTING SURFACE (MM)	max.12
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.8
INFORMATION	ADJUSTABLE 2 x REFLECTOR WFL-45° EXCL.LED POWER SUPPLY 350-700mA-DC Optional REFLECTORS 20° & 30° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8-12,4W / CRI>90 (R9: 52) / 3000K / 787-1467lm)
RVALUES	rf: 90 / Rg: 99
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2934lm // 24,8W // 118lm/W
LED TECHNICS (LUMINAIRE)	1877lm // 29W // 66lm/W

Remarks

Max.500mA when using accessories

Requirements

SPY 52 TUBE
LED POWER SUPPLY 350 / 500 / 700mA-DC

SPLITBOX 2 SPY 52 93045 W
 100070 9330 W

Accessories

- HONEYCOMB 42
- SPREAD LENS 42
- LINEAR SPREAD LENS 42
- SOFTENING LENS 42
- GLASS SBL 42










For detailed installation instructions, please consult the manual: [100070_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-

SPLITBOX 2 SPY 52 93045 W
100070 9330 W











FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->2(2) / 1->2(2) / 1->2(1)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) / 1(0,5) / 1(0,5)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->3(3) / 1->3(2) / 1->2(1)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) / 1(0,5) / 0,5(0,5)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) / 1(0,5) / 0,5(0,5)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1/1/1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1/1/1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1/1/1	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1/1/1	☐

 DELTALIGHT®


SPLITBOX 2 SPY 52 93045 W

100070 9330 W

	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1/1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	0,5 / 0,5	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1/1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1/1/0,5	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	0,5	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	0,5	☐
	21012 0328 LED POWER SUPPLY 700mA / 15W DIM8	0,5	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1(0,5)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0,5)	☐

SPLITBOX 2 SPY 52 93045 W


100070 9330 W



21032 0295

LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5


1 ☐



21032 0305

LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1 ☐



21032 0315

LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1 ☐


Light altering devices



19810 0010 B

HONEYCOMB 42 SINGLE USE B


☐



19810 0020

LINEAR SPREAD LENS 42


☐



19810 0030

SPREAD LENS 42


☐



19810 0040

SOFTENING LENS 42


☐



19810 0050

GLASS SBL 42

☐



19810 0060 B

HONEYCOMB 42 DOUBLE USE B

☐




SPLITBOX 2 SPY 52 93045 W

100070 9330 W

Finish your product

	19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐
	19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

Notes:





SPLITBOX 3 SPY 52 SOFT 93020 W

100075 9020 W

AVAILABLE IN

BLACK 100075 9020 B

WHITE 100075 9020 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 365 x 150
RECESSED DEPTH (MM)	180
THICKNESS OF MOUNTING SURFACE (MM)	max.12
INGRESS PROTECTION	IP20
WEIGHT (KG)	5.8
INFORMATION	ADJUSTABLE 3 x REFLECTOR FL-20° EXCL.LED POWER SUPPLY 500mA-DC Optional REFLECTORS 30° & 45° available

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	3 x (LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm)
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	3114lm // 30,6W // 109lm/W
LED TECHNICS (LUMINAIRE)	1951lm // 35W // 55lm/W

Requirements

SPY 52 TUBE
LED POWER SUPPLY 500mA-DC DIM

Accessories

HONEYCOMB 42
SPREAD LENS 42
LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

SPLITBOX 3 SPY 52 SOFT 93020 W
 100075 9020 W

For detailed installation instructions, please consult the manual: [100075_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY


Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-

SPLITBOX 3 SPY 52 SOFT 93020 W

100075 9020 W


FINISH YOUR SPECIFICATION

LED power supplies #



300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

1(1)

☐

300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9






1(1)

☐

SPLITBOX 3 SPY 52 SOFT 93020 W

100075 9020 W

Light altering devices

	19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
	19810 0020 LINEAR SPREAD LENS 42	☐
	19810 0030 SPREAD LENS 42	☐
	19810 0040 SOFTENING LENS 42	☐
	19810 0050 GLASS SBL 42	☐
	19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐




SPLITBOX 3 SPY 52 SOFT 93020 W

100075 9020 W

Finish your product

	19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐
	19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens



	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

Notes:



SPLITBOX 2 SPY FOCUS LP 927 B
 100069 9200 B

AVAILABLE IN
BLACK 100069 9200 B
WHITE 100069 9200 W




[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 275 x 150
RECESSED DEPTH (MM)	180
THICKNESS OF MOUNTING SURFACE (MM)	max.12
INGRESS PROTECTION	IP20
WEIGHT (KG)	4.6
INFORMATION	ADJUSTABLE 2 x ADJUSTABLE BEAM 8°-43° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	2 x (LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 702-974lm)
RVALUES	rf: 89 / Rg: 100
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1948lm // 17,2W // 113lm/W
LED TECHNICS (LUMINAIRE)	799lm // 20W // 40lm/W

Requirements

LED POWER SUPPLY 350 / 500mA-DC DIM

For detailed installation instructions, please consult the manual: [100069_XXX0_HAND.pdf](#)

SPLITBOX 2 SPY FOCUS LP 927 B

100069 9200 B










CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-

SPLITBOX 2 SPY FOCUS LP 927 B











100069 9200 B

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->2(2) / 1->2(1)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1(1) / 1(0,5)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->3(3) / 1->3(2)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1) / 1(0,5)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1) / 1(0,5)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1 / 1	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1 / 1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1 / 1	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1 / 1	☐


SPLITBOX 2 SPY FOCUS LP 927 B

100069 9200 B

	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	0,5	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	0,5	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1/1	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	0,5	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	0,5	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1(1)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1(0,5)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1	☐

SPLITBOX 2 SPY FOCUS LP 927 B

100069 9200 B



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1



Notes:




SPLITBOX 3 SPY FOCUS LP 930 W

100073 9300 W

AVAILABLE IN

BLACK 100073 9300 B

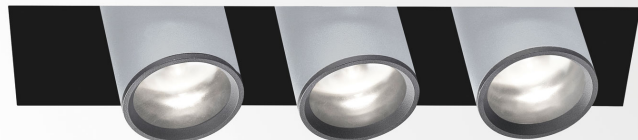WHITE 100073 9300 W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	rectangle - 365 x 150
RECESSED DEPTH (MM)	180
THICKNESS OF MOUNTING SURFACE (MM)	max.12
INGRESS PROTECTION	IP20
WEIGHT (KG)	5.5
INFORMATION	ADJUSTABLE 3 x ADJUSTABLE BEAM 8°-43° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	3 x (LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 734-1018lm)
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	3054lm // 25,8W // 118lm/W
LED TECHNICS (LUMINAIRE)	1252lm // 30W // 42lm/W

Requirements

LED POWER SUPPLY 350 / 500mA-DC DIM

For detailed installation instructions, please consult the manual: [100073_XXX0_HAND.pdf](#)

SPLITBOX 3 SPY FOCUS LP 930 W

100073 9300 W










CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-

SPLITBOX 3 SPY FOCUS LP 930 W


100073 9300 W

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1(1) / 1(1)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	2/3(2/3) / 2/3(1/3)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->2(2) / 1->3(2/3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2/3(2/3) / 2/3(1/3)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2/3(2/3) / 2/3(1/3)	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1/1	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1/1	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1/1	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1/3	☐


SPLITBOX 3 SPY FOCUS LP 930 W

100073 9300 W




21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

2/3->2/3 ☐




21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

1/3 ☐




21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

2/3->2/3 ☐




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

2/3 / 2/3 ☐




21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8

1/3 ☐




21012 0318 LED POWER SUPPLY 500mA / 10W DIM8

1/3 ☐



21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2/3 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

2/3 ☐

Notes: