





TWEETER M ST 92733 B-C

418 21 811 922 B-C

AVAILABLE IN
BLACK-CHROMED 418 21 811 922 B-C
WHITE-WHITE 418 21 811 922 W-W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 114
RECESSED DEPTH (MM)	80
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.7
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-33° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 753-1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	829lm // 10W // 84lm/W

Requirements

LED POWER SUPPLY 350 / 500mA-DC DIM

For detailed installation instructions, please consult the manual: [418_21_811_XXX_HAND.pdf](#)

TWEETER M ST 92733 B-C
 418 21 811 922 B-C










CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Wood	-
 Stretched ceiling	-

TWEETER M ST 92733 B-C






418 21 811 922 B-C

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(1) / 1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(1) / 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(1) / 1(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->2 / 1->2	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2	☐

TWEETER M ST 92733 B-C

418 21 811 922 B-C

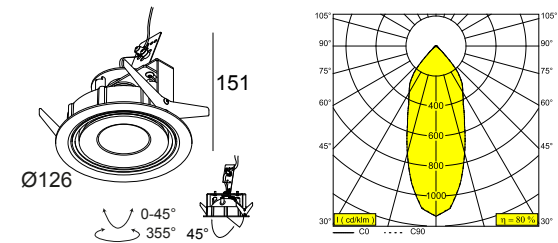
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2 / 1 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1-2(2) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1-2(1) ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1 ☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1 ☐

Notes:



TWEETER M ST 93033 W-W
418 21 811 932 W-W

AVAILABLE IN
BLACK-CHROMED 418 21 811 932 B-C
WHITE-WHITE 418 21 811 932 W-W



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 114
RECESSED DEPTH (MM)	80
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.7
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-33° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 787-1089lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	867lm // 10W // 88lm/W

Requirements

LED POWER SUPPLY 350 / 500mA-DC DIM

For detailed installation instructions, please consult the manual: [418_21_811_XXX_HAND.pdf](#)

TWEETER M ST 93033 W-W

418 21 811 932 W-W










CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Wood	-
 Stretched ceiling	-

TWEETER M ST 93033 W-W






418 21 811 932 W-W

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(1) / 1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(1) / 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(1) / 1(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->2 / 1->2	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2	☐

TWEETER M ST 93033 W-W

418 21 811 932 W-W

	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2 / 1 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1-2(2) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1-2(1) ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1 ☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1 ☐

Notes:





TWEETER M TRIMLESS 92733 B-C

418 11 811 922 B-C

AVAILABLE IN

BLACK-CHROMED 418 11 811 922 B-C

WHITE-WHITE 418 11 811 922 W-W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	80
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-33° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 753-1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	829lm // 10W // 84lm/W

Requirements

MOUNTING KIT R102 TRIMLESS O.F.A.

LED POWER SUPPLY 350 / 500mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual: [418_11_811_XXX_HAND.pdf](#)

TWEETER M TRIMLESS 92733 B-C

418 11 811 922 B-C










CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Plasterboard	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stucanet	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stretched ceiling	 MOUNTING KIT R102 TRIMLESS CSC	Required
	 MOUNTING KIT R102 TRIMLESS WSC	Required

TWEETER M TRIMLESS 92733 B-C


418 11 811 922 B-C

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->4(4) / 1->4(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(1) / 1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1->2(1) / 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1->2(1) / 1(1)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->2 / 1->2	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	1	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2	☐


TWEETER M TRIMLESS 92733 B-C

418 11 811 922 B-C




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

2 / 1 ☐




21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1-2(2) ☐




21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1-2(1) ☐



21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5


1 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1 ☐


Mounting kits



15212 2010 MOUNTING KIT R102 TRIMLESS O.F.A.

☐

Mounting kits stretched ceiling



15212 0090 MOUNTING KIT R102 TRIMLESS CSC

☐



15212 0170 MOUNTING KIT R102 TRIMLESS WSC

☐



TWEETER M TRIMLESS 92733 B-C

418 11 811 922 B-C



Notes:



TWEETER M TRIMLESS SOFT 93045 W-W

21613 9030 W-W

AVAILABLE IN
BLACK-CHROMED 21613 9030 B-C
WHITE-WHITE 21613 9030 W-W



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	80
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	836lm // 12W // 71lm/W

Requirements

MOUNTING KIT R102 TRIMLESS O.F.A.
LED POWER SUPPLY 500mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual: [21613_XXX0_HAND.pdf](#)










TWEETER M TRIMLESS SOFT 93045 W-W
21613 9030 W-W

CEILING COMPATIBILITY





Ceiling Type	Mounting Kit	
 System ceiling	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Plasterboard	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stucanet	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Concrete + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Lintel + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 MOUNTING KIT R102 TRIMLESS O.F.A.	Required
 Stretched ceiling	 MOUNTING KIT R102 TRIMLESS CSC	Required
	 MOUNTING KIT R102 TRIMLESS WSC	Required

TWEETER M TRIMLESS SOFT 93045 W-W
21613 9030 W-W


FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->3(3)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	1->5(3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	1->2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	1->2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	1->2	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->2	☐



TWEETER M TRIMLESS SOFT 93045 W-W
21613 9030 W-W

	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1 ☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1 ☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1->2 ☐

Mounting kits

	15212 2010 MOUNTING KIT R102 TRIMLESS O.F.A.	☐
--	---	--------------------------

Mounting kits stretched ceiling

	15212 0090 MOUNTING KIT R102 TRIMLESS CSC	☐
	15212 0170 MOUNTING KIT R102 TRIMLESS WSC	☐



TWEETER M TRIMLESS SOFT 93045 W-W

21613 9030 W-W

Notes: