

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown



canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details

wall or ceiling lamp
canopy versionwall or ceiling lamp
recessed version


acoustic performance

SP ULA 090 canopy
SP ULA 090 recessed

canopy kg 5,8 m³ 0,128

recessed kg 2,5 m³ 0,126


Installazione downlight o uplight.
Downlight or uplight mounting.

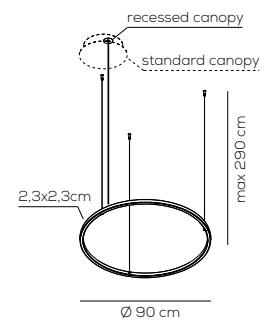

rosone standard / standard canopy



rosone incasso / recessed canopy



U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 090 LED	AN anthracite grey RU rust brown	XX standard canopy	LED 63W - diffused beam 3000K*, 2700K other CCT options available upon request

CE IP20 CRI90 LED ~5158 lm* 82 lm/W* 100-240VAc

Casambi compatibile / Casambi compatible.

U-LIGHT / recessed suspension lamp / DRIVER NOT INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 090 LED	AN anthracite grey RU rust brown	IN recessed canopy	LED 54W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request

CE IP20 CRI90 LED ~5158 lm* 951 lm/W* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

example composition code SP ULA090LED AN IN

Casambi compatibile / Casambi compatible.



KITFASPULA090AV opzione fonoassorbente avorio / sound absorbing option ivory.


Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	6000 HZ	125-8000 HZ	500-2000 HZ
A	0,02	0,18	0,57	1,11	1,11	1,15	1,04	0,74	0,93

This luminaire contains a light source with the energy class F.



SCAN ME



SP ULA 090 LED _ _ _ _

CUSTOMER _____

NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown




canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details


wall or ceiling lamp
canopy versionwall or ceiling lamp
recessed version

acoustic performance

SP ULA 120 canopy
SP ULA 120 recessed

canopy kg 6,5 m³ 0,180
recessed kg 3 m³ 0,150

Installazione downlight o uplight.
Downlight or upright mounting.

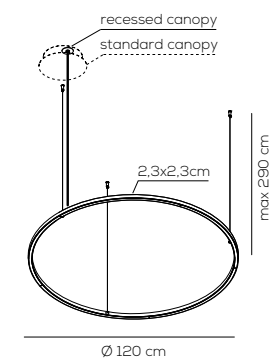


U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 120 LED	AN anthracite grey RU rust brown	XX standard canopy	LED 86W - diffused beam 3000K*, 2700K other CCT options available upon request

CE IP20 CRI90 ~7736 lm* 90 lm/W* 100-240V_{ac}

Casambi compatibile / Casambi compatible.



U-LIGHT / recessed suspension lamp / DRIVER NOT INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 120 LED	AN anthracite grey RU rust brown	IN recessed canopy	LED 74W - diffused beam 3000K*, 2700K 24V _{dc} other CCT options available upon request

CE IP20 CRI90 ~7736 lm* 104 lm/W* 24V_{dc}

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

example composition code SP ULA120LED RU IN
Casambi compatibile / Casambi compatible.



KITFASPULA000AV opzione fonoassorbente avorio / sound absorbing option ivory.

Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,04	0,35	1,23	2,03	2,13	2,09	2,02	1,41	1,80

SP ULA 120 LED _ _ _ _

CUSTOMER _____

NOTES _____

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey



canopy



rust brown




canopy

WALL AND CEILING LAMP VERSION




wall or ceiling details


wall or ceiling lamp
canopy version

wall or ceiling lamp
recessed version


acoustic performance

SP ULA 160 canopy SP ULA 160 recessed


canopy kg 9,1 m³ 0,310
recessed kg 4,8 m³ 0,280
Installazione downlight o uplight.
Downlight or uplight mounting.



rosone standard / standard canopy



rosone incasso / recessed canopy



U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 160 LED	AN anthracite grey RU rust brown	XX standard canopy	LED 125W - diffused beam 3000K*, 2700K other CCT options available upon request

CE IP20 CRI90 ~9025 lm* 72 lm/W* 100-240Vac

Casambi compatibile / Casambi compatible.

U-LIGHT / recessed suspension lamp / DRIVER NOT INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 160 LED	AN anthracite grey RU rust brown	IN recessed canopy	LED 102W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request

CE IP20 CRI90 ~9025 lm* 88 lm/W* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

example composition code **SP ULA160LED AN IN**
Casambi compatibile / Casambi compatible.



KITFASPULA000AV opzione fonoassorbente avorio / sound absorbing option ivory.
For more information see page 165

Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,11	0,65	2,06	3,63	3,63	3,64	3,45	2,45	3,11



SP ULA 160 LED _ _ _ _

CUSTOMER

NOTES

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources.
Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.