

Last information update: March 2025

Product configuration: RT68.S4

RT68.S4: Luminaire L=880 - Neutral White - Integrated DALI - Very Wide Flood (Down) optic - UGR<19 - 28.1W 4959lm - 4000K - Black/Black/Black Transparent

**Product code**

RT68.S4: Luminaire L=880 - Neutral White - Integrated DALI - Very Wide Flood (Down) optic - UGR<19 - 28.1W 4959lm - 4000K - Black/Black/Black Transparent

Technical description

Luminaire made of painted extruded aluminium, frame and caps made of injection-moulded thermoplastic. Very Wide Flood optic (80°) in a Space Opti-Diamond (PMMA) version with a rear cover available in a White (Transparent White) or Black (Transparent Black) version. Integrated DALI dimmable power supply with CRI80 direct emission Neutral white (4000K) monochrome LED lamp (Mid-Power). Version with UGR < 19 controlled luminance - in compliance with the standard for use in environments with video monitors ($L \leq 3000 \text{ cd/m}^2$).

Installation

For an electrified track

Colour

Black/Black/Black Transparent (S4)

Weight (Kg)

2.73


Mounting

internal wall corner|dali track|three circuit track|ceiling recessed|ceiling surface

Complies with EN60598-1 and pertinent regulations

**Technical data**


Im system:	4992	Lamp code:	LED
W system:	29	Number of lamps for optical assembly:	1
Im source:	6400	ZVEI Code:	LED
W source:	29	Number of optical assemblies:	1
Luminous efficiency (lm/W, real value):	172.1	Power factor:	See installation instructions
Im in emergency mode:	-	Inrush current:	10 A / 220 μ s
Total light flux at or above an angle of 90° [Lm]:	0	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
Light Output Ratio (L.O.R.) [%]:	78	Minimum dimming %:	1
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	4000	Control:	DALI-2
MacAdam Step:	3		

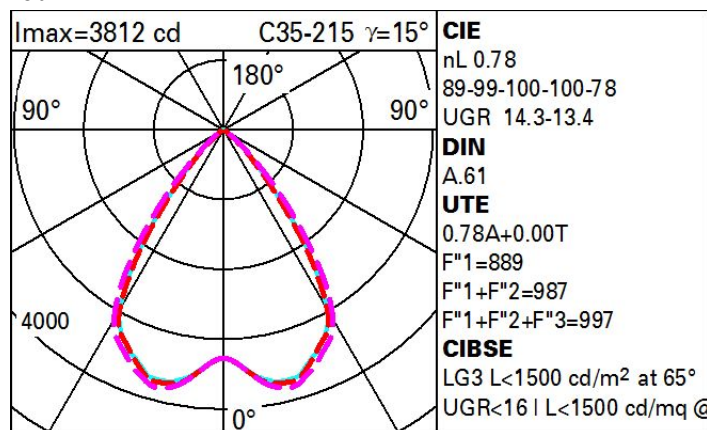Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	59	56	61	58	58	55	70
1.0	70	66	63	61	65	62	62	59	76
1.5	75	72	69	67	71	69	68	65	84
2.0	78	75	74	72	74	73	72	69	89
2.5	79	78	76	75	76	75	74	72	92
3.0	81	79	78	77	78	77	76	74	94
4.0	82	81	80	79	79	79	77	75	96
5.0	82	82	81	80	80	79	78	76	97

Luminance curve limit

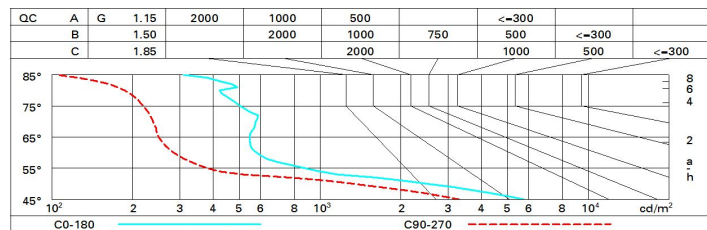

UGR diagram

Corrected UGR values (at 6400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	14.7	15.4	15.0	15.7	15.9	13.9	14.6	14.1	14.8	15.1
	3H	14.6	15.2	14.9	15.5	15.8	13.7	14.4	14.0	14.6	14.9
	4H	14.6	15.2	14.9	15.4	15.8	13.7	14.3	14.0	14.5	14.9
	6H	14.5	15.0	14.9	15.4	15.7	13.6	14.1	13.9	14.4	14.8
	8H	14.5	15.0	14.8	15.3	15.7	13.5	14.1	13.9	14.4	14.7
	12H	14.4	14.9	14.8	15.3	15.6	13.5	14.0	13.9	14.4	14.7
4H	2H	14.5	15.1	14.8	15.4	15.7	13.7	14.3	14.0	14.6	14.9
	3H	14.4	14.9	14.8	15.2	15.6	13.6	14.1	13.9	14.4	14.8
	4H	14.3	14.8	14.7	15.2	15.5	13.5	13.9	13.9	14.3	14.7
	6H	14.3	14.7	14.7	15.1	15.5	13.4	13.8	13.8	14.2	14.6
	8H	14.3	14.6	14.7	15.0	15.5	13.4	13.7	13.8	14.1	14.6
	12H	14.2	14.5	14.7	15.0	15.4	13.3	13.6	13.8	14.1	14.5
8H	4H	14.2	14.6	14.7	15.0	15.4	13.4	13.7	13.8	14.2	14.6
	6H	14.2	14.5	14.6	14.9	15.4	13.3	13.6	13.8	14.1	14.5
	8H	14.1	14.4	14.6	14.9	15.4	13.3	13.5	13.8	14.0	14.5
	12H	14.1	14.3	14.6	14.8	15.3	13.2	13.4	13.7	13.9	14.4
12H	4H	14.2	14.5	14.6	14.9	15.4	13.4	13.7	13.8	14.1	14.6
	6H	14.1	14.4	14.6	14.8	15.3	13.3	13.5	13.8	14.0	14.5
	8H	14.1	14.3	14.6	14.8	15.3	13.2	13.5	13.7	13.9	14.5
Variations with the observer position at spacing:											
S =	1.0H	3.6 / -8.7					3.8 / -9.6				
	1.5H	6.3 / -9.7					6.2 / -10.3				
	2.0H	8.3 / -10.3					8.2 / -10.6				