


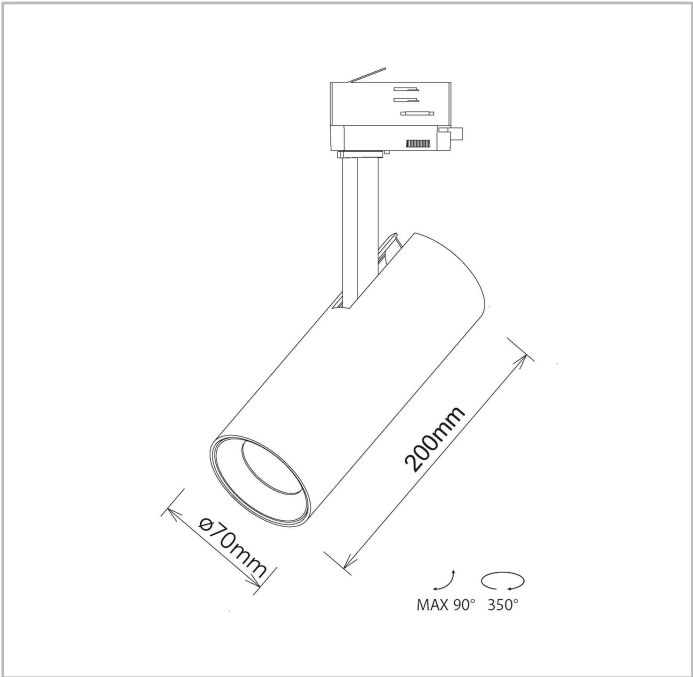

SKU	: 602GW93036F0
Housing Material	: Aluminum Die Cast
Housing Colour	: White (RAL 9003)
Luminaire Dimension [mm]	: Ø70x200mm
Cut-Out [mm]	: N/A
Optic	: Lens
Reflector Colour	: N/A
Beam Angle [deg]	: 36°
LED Power [W]	: N/A
System Power [W]	: 20W
Luminous Flux [lm]	: 1600lm
System Efficiency [lm/W]	: 80lm/W
CCT [K]	: 3000K
CRI [Ra]	: 90
Chromaticity Tolerance	: 3 MacAdam
Mains Voltage [VAc]	: 220-240V / 50 -60Hz
Power Supply	: Included ON/OFF
Nominal Current [mA]	: N/A
Forward Voltage [V]	: N/A
Ambient Temperature [degC]	: 35°C
Ingress Protection	: IP20

Light Source Identifier	: L2C5-30901205F1300
Lifetime/Failure Rate [h]	: 50000h
Electrical Safety Class	: Class I
Net Weight [Kg]	: 0.92Kg
Certificates/Declarations	: CE/UKCA
Warranty [Y]	: 5Y
Light Source	: 930 (3000K / CRI90)

All rated values @ ambient temperature of 25° C. Electric and photometric values are initially subject to a tolerance of +/- 10%. Tolerance of color temperature +/- 150K.
Technical data can change without prior notice.