





NIME TRIMLESS 927 PRIM

26411 9200 PRIM

AVAILABLE IN
PRIMER 26411 9200 PRIM



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	150
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 20°-50° EXCL.LED POWER SUPPLY 900mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-10,7W / CRI>90 (R9: 56) / 2700K / 385-814lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	814lm // 10,7W // 76lm/W
LED TECHNICS (LUMINAIRE)	382lm // 12W // 31lm/W

Requirements

MOUNTING KIT NIME O.F.A.
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual: [26411_XXX0_HAND.pdf](#)










NIME TRIMLESS 927 PRIM
26411 9200 PRIM

CEILING COMPATIBILITY











Ceiling Type	Mounting Kit		
 System ceiling		MOUNTING KIT NIME O.F.A.	Required
 Plasterboard		MOUNTING KIT NIME O.F.A.	Required
 Stucanet		MOUNTING KIT NIME O.F.A.	Required
 Concrete + plaster		MOUNTING KIT NIME O.F.A.	Required
 Lintel + plaster		MOUNTING KIT NIME O.F.A.	Required
 Hollow-core slab + plaster		MOUNTING KIT NIME O.F.A.	Required

NIME TRIMLESS 927 PRIM
26411 9200 PRIM


FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->6(6) / 1->6(4) / 1-> 5(3)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2) / 1->3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6) / 1->6(4)	☐
	300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8	2 -> 2	☐
	300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8	3 -> 4	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 3(2) / 3(2) / 2(1) / 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3 / 1->3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4 / 1->4	☐

NIME TRIMLESS 927 PRIM
26411 9200 PRIM


	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4 / 1->4 ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4 / 1->4 / 1->3 ☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	2->2 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	3->3 ☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2 / 2->2 ☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	4->4 / 3->4 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1->3 / 1->3 / 1->3 / 1->2 / 1->1 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1->4(3) ☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1->3(1) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1->4(2) ☐

NIME TRIMLESS 927 PRIM
26411 9200 PRIM




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->3 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3 ☐



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1->3 ☐

Mounting kits



26410 0010 MOUNTING KIT NIME O.F.A.

☐



Notes:



NIME TRIMLESS 930 PRIM

26411 9300 PRIM

AVAILABLE IN
PRIMER 26411 9300 PRIM



[View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	150
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 20°-50° EXCL.LED POWER SUPPLY 900mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-10,7W / CRI>90 (R9: 55) / 3000K / 385-814lm
TM-30 VALUES	rf: 92 / Rg: 98
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	814lm // 10,7W // 76lm/W
LED TECHNICS (LUMINAIRE)	382lm // 12W // 31lm/W

Requirements

MOUNTING KIT NIME O.F.A.
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual: [26411_XXX0_HAND.pdf](#)










NIME TRIMLESS 930 PRIM
26411 9300 PRIM

CEILING COMPATIBILITY











Ceiling Type	Mounting Kit		
 System ceiling		MOUNTING KIT NIME O.F.A.	Required
 Plasterboard		MOUNTING KIT NIME O.F.A.	Required
 Stucanet		MOUNTING KIT NIME O.F.A.	Required
 Concrete + plaster		MOUNTING KIT NIME O.F.A.	Required
 Lintel + plaster		MOUNTING KIT NIME O.F.A.	Required
 Hollow-core slab + plaster		MOUNTING KIT NIME O.F.A.	Required

NIME TRIMLESS 930 PRIM
26411 9300 PRIM


FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->6(6) / 1->6(4) / 1-> 5(3)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2) / 1->3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6) / 1->6(4)	☐
	300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8	2 -> 2	☐
	300 90 116 LED POWER SUPPLY 350mA-DC / 18W DIM8	3 -> 4	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 3(2) / 3(2) / 2(1) / 1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3 / 1->3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4 / 1->4	☐

NIME TRIMLESS 930 PRIM
26411 9300 PRIM


	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4 / 1->4 ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4 / 1->4 / 1->3 ☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	2->2 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	3->3 ☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2 / 2->2 ☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	4->4 / 3->4 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1->3 / 1->3 / 1->3 / 1->2 / 1->1 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1->4(3) ☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1->3(1) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1->4(2) ☐

NIME TRIMLESS 930 PRIM
26411 9300 PRIM




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->3 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3 ☐



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1->3 ☐

Mounting kits



26410 0010 MOUNTING KIT NIME O.F.A.



☐

Notes:



NIME II 92752 W
26414 9230 W

AVAILABLE IN
BLACK 26414 9230 B
WHITE 26414 9230 W



 [View on website](#)

General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 67
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	9,5-12,5
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS WFL-52° EXCL.LED POWER SUPPLY 350-700mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-8,2W / CRI>90 (R9: 56) / 2700K / 385-677lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	677lm // 8,2W // 83lm/W
LED TECHNICS (LUMINAIRE)	437lm // 9W // 46lm/W

Requirements

LED POWER SUPPLY 350 / 500 / 700mA-DC DIM


For detailed installation instructions, please consult the manual: [26414_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

Emergency units












21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B

☐

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W


☐

NIME II 92752 W
 26414 9230 W

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->5(5) / 1->5(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2) / 1->3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3 / 1->3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4 / 1->4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4 / 1->4	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4 / 1->4	☐


NIME II 92752 W

26414 9230 W




21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

2->2

☐



21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

3->3

☐



21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

2->2 / 2->2

☐



21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

4->4 / 3->4

☐



21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->3 / 1->3 / 1->3 / 1->2

☐



21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68

1->4(3)

☐



21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68

1->3(1)

☐



21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68

1->4(2)

☐


21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->3

☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3

☐

NIME II 92752 W

26414 9230 W

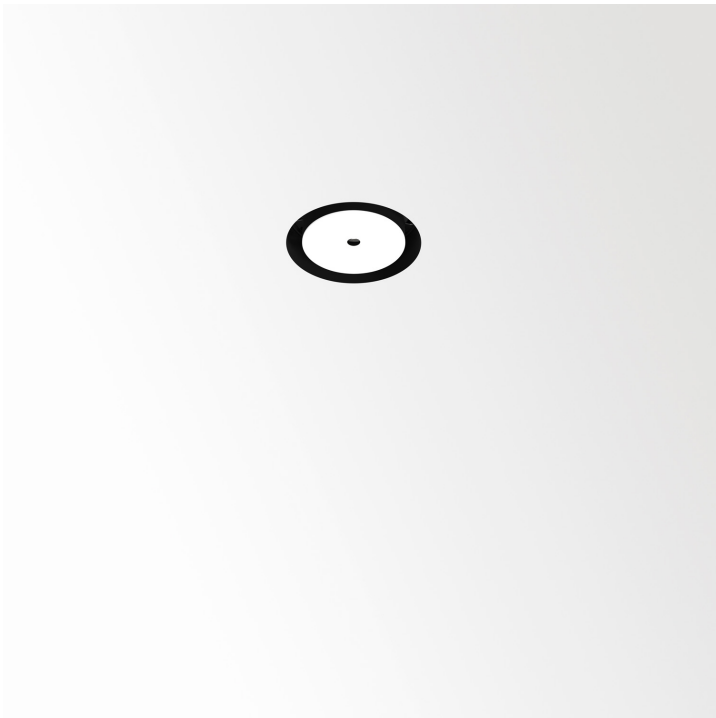


21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1->3





Notes:



NIME II AIR 92752 PRIM
 26412 9230 PRIM

AVAILABLE IN
PRIMER 26412 9230 PRIM




[View on website](#)

General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	LENS WFL-52° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-5,7W / CRI>90 (R9: 56) / 2700K / 385-519lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	519lm // 5,7W // 90lm/W
LED TECHNICS (LUMINAIRE)	335lm // 7W // 51lm/W

Requirements	
MOUNTING KIT AIR 105	
LED POWER SUPPLY 350 / 500mA-DC DIM	

For detailed installation instructions, please consult the manual: [26412_XXX0_HAND.pdf](#)










NIME II AIR 92752 PRIM
26412 9230 PRIM

CEILING COMPATIBILITY










Ceiling Type	Mounting Kit
 Ventilation in plasterboard	 MOUNTING KIT SIDE AIR ONLY 1 Required
	 MOUNTING KIT SIDE AIR 105 Required
	 MOUNTING KIT NO AIR 105 Required
 Ventilation in concrete + plaster	 MOUNTING KIT NO AIR 105 Required
	 MOUNTING KIT TOP AIR 105 Required
	 MOUNTING KIT TOP AIR ONLY 1 Required

NIME II AIR 92752 PRIM
26412 9230 PRIM

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->5(5)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 1->3(2) / 1->3(2)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4	☐


NIME II AIR 92752 PRIM
26412 9230 PRIM

	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	2->2 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	3->3 ☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2 ☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	4->4 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1->3 / 1->3 / 1->3 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1->4(3) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1->4(2) ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1->3 ☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1->3 ☐

NIME II AIR 92752 PRIM

26412 9230 PRIM

Mounting kits side air + light




Technical drawing of the mounting kit side air + light. It shows a top view with dimensions: Ø100, 149, 180, and 205. A side view shows a height of 172.

29810 0110 MOUNTING KIT SIDE AIR 105

☐

Mounting kits top air + light




Technical drawing of the mounting kit top air + light. It shows a top view with dimensions: Ø125, 172, 171, and 235. A side view shows a height of 149.

29810 0130 MOUNTING KIT TOP AIR 105

☐

Mounting kits side air only




Technical drawing of the mounting kit side air only. It shows a top view with dimensions: Ø100, 149, 180, and 205. A side view shows a height of 172.

29810 0100 MOUNTING KIT SIDE AIR ONLY 1

☐

Mounting kits top air only




Technical drawing of the mounting kit top air only. It shows a top view with dimensions: Ø125, 172, 171, and 235. A side view shows a height of 149.

29810 0200 MOUNTING KIT TOP AIR ONLY 1

☐

Mounting kits no air



Technical drawing of the mounting kit no air. It shows a top view with dimensions: Ø100, 149, 180, and 205. A side view shows a height of 172.

29810 0120 MOUNTING KIT NO AIR 105

☐





NIME II AIR 92752 PRIM

26412 9230 PRIM

Notes:

NIME II TRIMLESS 92735

26413 9220



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 54
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	9,5-12,5
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	non adjustable
INFORMATION	LENS FL-35° EXCL.LED POWER SUPPLY 350-700mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on type of external power supply
ENERGY CLASS	G

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-8,2W / CRI>90 (R9: 56) / 2700K / 385-677lm
TM-30 VALUES	Rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	677lm // 8,2W // 83lm/W
LED TECHNICS (LUMINAIRE)	420lm // 9W // 45lm/W

Remarks

Access above ceiling required

Requirements

LED POWER SUPPLY 350 / 500 / 700mA-DC DIM



NIME II TRIMLESS 92735










26413 9220

For detailed installation instructions, please consult the manual: [**26413_XXX0_HAND.pdf**](#)

NIME II TRIMLESS 92735


26413 9220

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->5(5) / 1->5(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2) / 1->3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3 / 1->3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4 / 1->4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4 / 1->4	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4 / 1->4	☐


NIME II TRIMLESS 92735

26413 9220




21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

2->2 ☐




21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

3->3 ☐




21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8

2->2 / 2->2 ☐




21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8

4->4 / 3->4 ☐




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1->3 / 1->3 / 1->3 / 1->2 ☐




21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1->3 ☐



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

1->3 ☐



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1->3 ☐


Notes:



NIME II TRIMLESS OK 92735 PRIM

26415 9220 PRIM

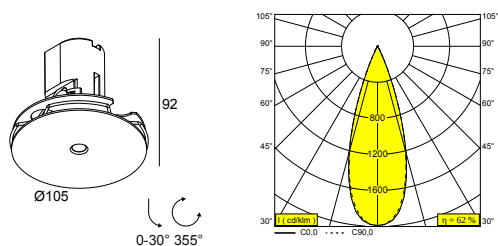AVAILABLE IN
PRIMER 26415 9220 PRIM



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	150
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 30° swiveling, 355° rotatable
INFORMATION	LENS FL-35° EXCL.LED POWER SUPPLY 350-700mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	G
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-8,2W / CRI>90 (R9: 56) / 2700K / 385-677lm
TM-30 VALUES	rf: 91 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
LED TECHNICS (LIGHT SOURCE)	677lm // 8,2W // 83lm/W
LED TECHNICS (LUMINAIRE)	420lm // 9W // 45lm/W

Requirements

MOUNTING KIT NIME O.F.A.
LED POWER SUPPLY 350 / 500 / 700mA-DC DIM (Remote)

For detailed installation instructions, please consult the manual: [26415_XXX0_HAND.pdf](#)










NIME II TRIMLESS OK 92735 PRIM
26415 9220 PRIM

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 MOUNTING KIT NIME O.F.A. 
 Plasterboard	 MOUNTING KIT NIME O.F.A. 
 Stucanet	 MOUNTING KIT NIME O.F.A. 
 Concrete + plaster	 MOUNTING KIT NIME O.F.A. 
 Lintel + plaster	 MOUNTING KIT NIME O.F.A. 
 Hollow-core slab + plaster	 MOUNTING KIT NIME O.F.A. 











NIME II TRIMLESS OK 92735 PRIM
26415 9220 PRIM

FINISH YOUR SPECIFICATION

LED power supplies			#
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	1->6(6) / 1->6(6) / 1->6(4)	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	1->4(3) / 1->4(2) / 1->3(2) / 1->3(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	3->9(9) / 1->9(6) / 1->6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2->4(3) / 1->3(2) / 1->3(2) / 1->2(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER	2->3 / 2->3 / 1->3	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1	2->4 / 2->4 / 1->4	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	2->4 / 2->4 / 1->4	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	1->4 / 1->4 / 1->4 / 1->4	☐


NIME II TRIMLESS OK 92735 PRIM

26415 9220 PRIM

	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	2->2 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	3->3 ☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	2->2 / 2->2 ☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	4->4 / 3->4 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1->3 / 1->3 / 1->3 / 1->2 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	1->4(3) ☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68	1->3(1) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	1->4(2) ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	1->3 ☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	1->3 ☐

NIME II TRIMLESS OK 92735 PRIM

26415 9220 PRIM



21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5

1->3



Mounting kits



26410 0010 MOUNTING KIT NIME O.F.A.



Notes: